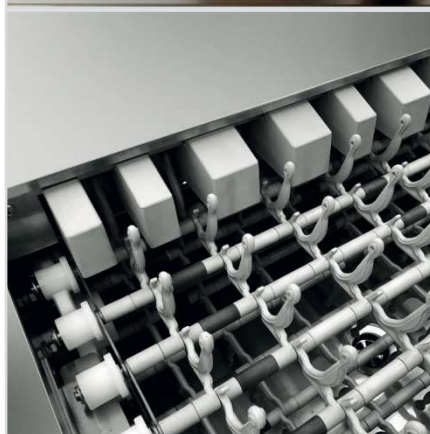




Big news at DIHR! We are happy to introduce the "Green" QX PRO! This range has been enhanced and rewarded with the SMART LABEL HOST 2023 award for its functional efficiency. Thanks to innovative pre-rinse and rinse arms, we have achieved exceptional results while maintaining the same performance: 35% water savings compared to previous versions! Enhanced new options like renewed triple rinse, with osmotic water supply (on request) and improved drying system, we are proud to introduce flexible, complete and first-class flight-type conveyor dishwashers. Our goal is to minimize the use of environmental resources and operating costs. The features such as the detergent economizer, thermal insulation, the CPF

system and the double reinforced rinse demonstrate DIHR's willingness to progress through innovative solutions and become more environmentally friendly. As always, the DIHR flight-type conveyor dishwashers are available in multiple versions that can be combined with our other ranges (tray washers, rack conveyor dishwashers, transportation systems, etc). Our washing solutions, increasingly efficient over the years, adjust to different requirements while guaranteeing high hygiene standards to ensure optimal sanitation.



FEATURES

STANDARD

- SMART DRIVE 5 speeds advancement system
- 710 mm wide conveyor
- Plates belt
- TFT 5.7" display and soft touch keyboard
- Frequently used keys shortcut and menu language setting
- Constant monitoring of key operations
- IPX5 electronic board
- Alarms and events report
- Autotimer
- Centralized 1-DRAIN and automatic AD drain, with total or partial emptying of the tanks
- Wash arms ALL-IN-1
- Use economizer
- ECO-DET detergent economizer
- ACID PROOF radial wash tanks in S/S AISI 316 inclined to provide complete drainage of the wash water
- S/S surface filters CLEAN+ to protect the wash tanks as well as the wash pump
- Double-skin, insulated and counterbalanced doors, equipped with anti-drop safety system
- THERMO BARRIER system for comfort in use
- Predisposition for DIHR rinse-aid and detergent dispensers connection
- Non return valve
- ACID PROOF stainless steel boilers in AISI 316, fully insulated to reduce thermal loss.
- Vertical self-cleaning pumps
- Reinforced double rinse 2R+, improved efficiency with lower consumption
- CPF System: Controlled Pressure Flow
- Water, energy consumptions and working time control system



OPTIONS

- Five different conveyor belts available, also with cutlery lane
- Different types of dryers: double skin dryer on module (with or without turboblowers) or on shelf (double skin on request)
- Possible working modes for dryer unit: all off, only fan, half power 4,5 kW + fan, total power 9 kW + fan
- Double skin lateral dryer on shelf: innovative system with upper fan for improved drying results
- Steam condenser
- Three models of heat recovery to be chosen
- Triple reinforced rinse 3R+ for drastically reduced water consumption (with reverse osmosis water on separate module on request)
- AS6 Automatic shower with EASY+ with filter system
- Dispensers kit with peristaltic pump, for detergent as well as rinse-aid
- CONNECTIVITY remote control compliant with the HACCP norms (on request)
- Delivery in two or more parts, to ease installation operations
- Automatic self-cleaning of the machine available, with dedicated booster pump on request
- Tank insulation
- Break tank and booster pump
- Dedicated space for detergent and rinse-aid jugs
- S/S pumps
- Extra power in the boiler

STANDARD BELTS



Standard belt
for plates and
optional cutlery lane

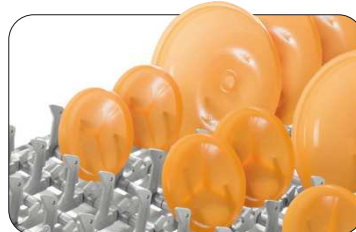


Standard belt
for glasses



Standard belt
for trays and utensils


OPTIONAL BELTS



Special belt
for hospitals



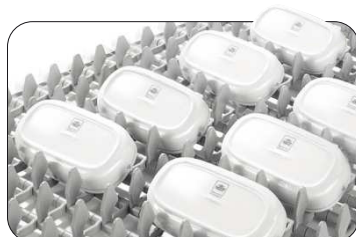Special belt
for thermal trays




Special belt
for in-flight catering

CONNECTIVITY 4.0 & APP

WHEREVER YOU ARE...
YOUR DISHWASHER, JUST A CLICK AWAY

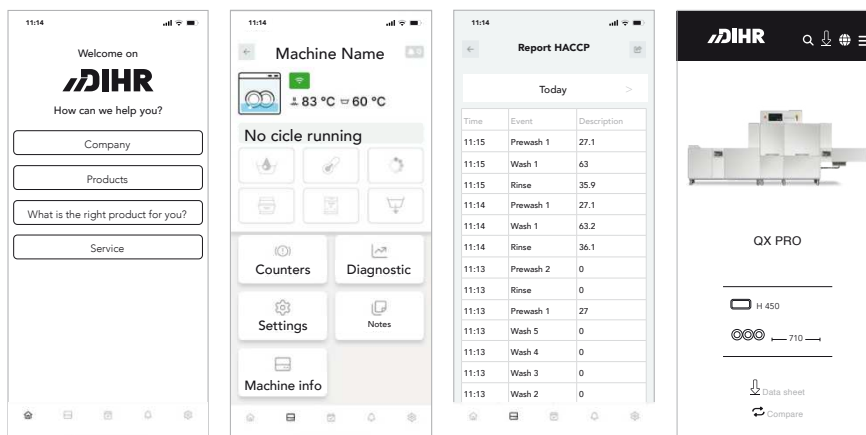You will be constantly connected to the machine to monitor the work phases, review any eventual alarm and configure remotely the operating parameters according to your needs. Compliant with HACCP norms. Thanks to our brand new App, you will have access to connected machines and all commercial and technical documentation.



SMART LABEL HOST 2023 FOR FUNCTIONAL EFFICIENCY

According to the DIHR's sustainability vision and attention to customer operating costs, the QX range of flight conveyor dishwashers has been renewed. The result is a big amount of reduction the water consumption: more than 35% when compared to the previous version, an important figure in today's environmental and economic needs. To do so, new rinse and pre-rinse arms and ramps have been designed to achieve one of the lowest consumption levels in our sector. With lower water, DIHR continues to ensure high quality rinsing results. Indeed, a higher washing pressure guarantees optimal results with the removal of all the chemicals present on the dishes. Because of reduction the water consumption is caused the significant savings of such high expensive essential parts for washing like the energy and detergent.



View all the working parameters and event records, working hours and any problem at any time.



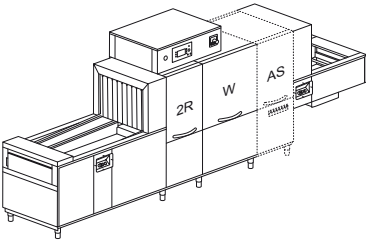
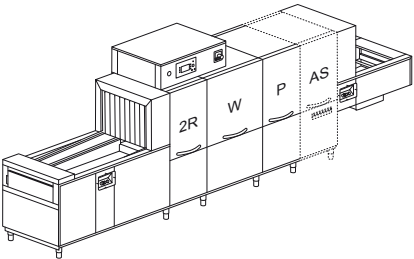
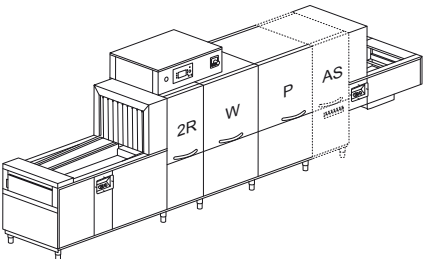
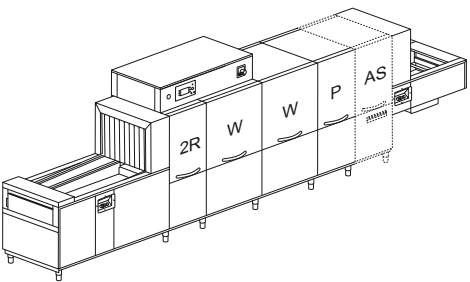
In case of problem, the machine promptly alerts you. The technician can intervene remotely to solve the problem or anticipate the needed parts for an on-site intervention.



A daily activity report is available with all the events related to the dishwasher in a detailed spreadsheet with HACCP data.



Our Connectivity system is a revolutionary device limiting and facilitating the eventual intervention of a technician who can anticipate the necessary parts to be replaced, saving time and money.

Model	Voltage	Capacity	Dimensions	Code
QX 246 5 SPEEDS				
IMPROVED				
	400 V 3N ~ 50 Hz 24 kW	 450 H		QX 246
		 710	4500x985 1860/2200H 595 kg	QX 246 AS6
	400 V 3N ~ 50 Hz 2,5 kW 35 kg/h	1950 / 3690 dishes / h	AS6 +600 mm	QX 246 V
		2400* dishes / h		QX 246 V AS6
QX 376 5 SPEEDS				
IMPROVED				
	400 V 3N ~ 50 Hz 26,45 kW	 450 H		QX 376
		 710	5100x985 1860/2200H 730 kg	QX 376 AS6
	400 V 3N ~ 50 Hz 3,45 kW 38 kg/h	2400 / 4050 dishes / h	AS6 +600 mm	QX 376 V
		3300* dishes / h		QX 376 V AS6
QX 416 5 SPEEDS				
IMPROVED				
	400 V 3N ~ 50 Hz 27,5 kW	 450 H		QX 416
		 710	5400x985 1860/2200H 745 kg	QX 416 AS6
	400 V3N ~ 50 Hz 4,5 kW 38 kg/h	3000 / 4800 dishes / h	AS6 +600 mm	QX 416 V
		3750* dishes / h		QX 416 V AS6
QX 536 5 SPEEDS				
IMPROVED				
	400 V3N ~ 50 Hz 41,95 kW	 450 H		QX 536
		 710	6000x985x 1860/2200H 880 kg	QX 536 AS6
	400 V 3N ~ 50 Hz 5,45 kW 60 kg/h	4200 / 6450 dishes / h	AS6 +600 mm	QX 536 V
		4650* dishes / h		QX 536 V AS6

Model	Voltage	Capacity	Dimensions	Code
QX 596 5 SPEEDS				
				QX 596
	400 V 3N ~ 50 Hz 44,5 kW	450 H 710	6300x985 1860/2200H 895 kg	QX 596 AS6
	400 V 3N ~ 50 Hz 6,5 kW 63 kg/h	4350 / 6750 dishes / h 5100* dishes / h	AS6 +600 mm	QX 596 V
				QX 596 V AS6
QX 676 5 SPEEDS				
				QX 676
	400 V 3N ~ 50 Hz 57,45 kW	450 H 710	7300x985 1860/2200H 1030 kg	QX 676 AS6
	400 V 3N ~ 50 Hz 7,45 kW 82 kg/h	5250 / 8100 dishes / h 6000* dishes / h	AS6 +600 mm	QX 676 V
				QX 676 V AS6
QX 776 5 SPEEDS				
				QX 776
	400 V 3N ~ 50 Hz 61,5 kW	450 H 710	7600x985 1860/2200H 1045 kg	QX 776 AS6
	400 V 3N ~ 50 Hz 8,5 kW 87 kg/h	5850 / 9000 dishes / h 6450* dishes / h	AS6 +600 mm	QX 776 V
				QX 776 V AS6

- P** Prewash
W Wash
2R Double reinforced rinse (pre-rinse + rinse on module)
3R+ Reinforced triple rinse with low water consumption: double pre-rinse + rinse on module (reverse osmosis on request)
AS6 Automatic shower with filter drawer +600 mm
V Steam-heated
***** Productivity according to DIN SPEC 10534 regulation (contact time)

EAC label upon request

Option compatibility to be confirmed by the manufacturer after verification

OPTIONS

				AUTOTIMER	PRE DOS	DDE-GROUP	DOS/S	SAN
Model	220-240 V 3 50 Hz	380-415 V 3N 50 Hz	60 Hz	Autotimer	DIHR disp. connections	Dispensers kit	Dispenser with probe	Sanitization system
QX 246	+ 2%	●	+ 3%	●	●	€	€	€
QX 246 AS6	+ 2%	●	+ 3%	●	●	€	€	€
QX 246 V	+ 1%	●	+ 3%	●	●	€	€	€
QX 246 V AS6	+ 1%	●	+ 3%	●	●	€	€	€
QX 376	+ 2%	●	+ 3%	●	●	€	€	€
QX 376 AS6	+ 2%	●	+ 3%	●	●	€	€	€
QX 376 V	+ 1%	●	+ 3%	●	●	€	€	€
QX 376 V AS6	+ 1%	●	+ 3%	●	●	€	€	€
QX 416	+ 2%	●	+ 3%	●	●	€	€	€
QX 416 AS6	+ 2%	●	+ 3%	●	●	€	€	€
QX 416 V	+ 1%	●	+ 3%	●	●	€	€	€
QX 416 V AS6	+ 1%	●	+ 3%	●	●	€	€	€
QX 536	+ 2%	●	+ 3%	●	●	€	€	€
QX 536 AS6	+ 2%	●	+ 3%	●	●	€	€	€
QX 536 V	+ 1%	●	+ 3%	●	●	€	€	€
QX 536 V AS6	+ 1%	●	+ 3%	●	●	€	€	€
QX 596	+ 2%	●	+ 3%	●	●	€	€	€
QX 596 AS6	+ 2%	●	+ 3%	●	●	€	€	€
QX 596 V	+ 1%	●	+ 3%	●	●	€	€	€
QX 596 V AS6	+ 1%	●	+ 3%	●	●	€	€	€
QX 676	+ 2%	●	+ 3%	●	●	€	€	€
QX 676 AS6	+ 2%	●	+ 3%	●	●	€	€	€
QX 676 V	+ 1%	●	+ 3%	●	●	€	€	€
QX 676 V AS6	+ 1%	●	+ 3%	●	●	€	€	€
QX 776	+ 2%	●	+ 3%	●	●	€	€	€
QX 776 AS6	+ 2%	●	+ 3%	●	●	€	€	€
QX 776 V	+ 1%	●	+ 3%	●	●	€	€	€
QX 776 V AS6	+ 1%	●	+ 3%	●	●	€	€	€

● Standard

□ Upon request

DDE-GROUP Both detergent (with probe) and rinse-aid dispensers included

DWI Insulation option for the tunnel only, dryer excluded. Shelf dryer can be double skin upon request

	PAP-SAN	DWI	DWI / T	CONNECTIVITY	XP	PAP	DRIVE
Model	Booster pump sanitiz.	Thermoacoustic insulation	Tank insulation	Connectivity (HACCP)	Extra power	Booster pump	Smart drive 5 speeds
QX 246	€	€	€	€	€	€	●
QX 246 AS6	€	€	€	€	€	€	●
QX 246 V	€	€	€	€	□	€	●
QX 246 V AS6	€	€	€	€	□	€	●
QX 376	€	€	€	€	€	€	●
QX 376 AS6	●	€	€	€	€	€	●
QX 376 V	€	€	€	€	□	€	●
QX 376 V AS6	●	€	€	€	□	€	●
QX 416	€	€	€	€	€	€	●
QX 416 AS6	●	€	€	€	€	€	●
QX 416 V	€	€	€	€	□	€	●
QX 416 V AS6	●	€	€	€	□	€	●
QX 536	●	€	€	€	€	€	●
QX 536 AS6	●	€	€	€	€	€	●
QX 536 V	●	€	€	€	€	€	●
QX 536 V AS6	●	€	€	€	€	€	●
QX 596	●	€	€	€	€	€	●
QX 596 AS6	●	€	€	€	€	€	●
QX 596 V	●	€	€	€	€	€	●
QX 596 V AS6	●	€	€	€	€	€	●
QX 676	●	€	€	€	€	€	●
QX 676 AS6	●	€	€	€	€	€	●
QX 676 V	●	€	€	€	€	€	●
QX 676 V AS6	●	€	€	€	€	€	●
QX 776	●	€	€	€	€	€	●
QX 776 AS6	●	€	€	€	€	€	●
QX 776 V	●	€	€	€	□	€	●
QX 776 V AS6	●	€	€	€	□	€	●

DWI - DWI/T Recommended with HR10 – HR20 – HRP40

CONNECTIVITY Includes HACCP option. 10 year plan

PAP-SAN One standard pump for models QX 536, QX 596, QX 676, QX 776

XP In case of cold water supply for rinse 8 °C 55 °C, and without any heat recovery, the extra power option is mandatory
In case of cold water supply for rinse (8-15 °C), we recommend to install the heat recovery system as optional.

Option compatibility to be confirmed by the manufacturer after verification

OPTIONS

Model	Master switch	Surface filters	Peak-cut for DIHR dosing	Estimated consumption readout	PI	1-DRAIN
					S/S pumps	Centralized drain
QX 246	●	●	●	●	€	●
QX 246 AS6	●	●	●	●	€	●
QX 246 V	●	●	●	●	€	●
QX 246 V AS6	●	●	●	●	€	●
QX 376	●	●	●	●	€	●
QX 376 AS6	●	●	●	●	€	●
QX 376 V	●	●	●	●	€	●
QX 376 V AS6	●	●	●	●	€	●
QX 416	●	●	●	●	€	●
QX 416 AS6	●	●	●	●	€	●
QX 416 V	●	●	●	●	€	●
QX 416 V AS6	●	●	●	●	€	●
QX 536	●	●	●	●	€	●
QX 536 AS6	●	●	●	●	€	●
QX 536 V	●	●	●	●	€	●
QX 536 V AS6	●	●	●	●	€	●
QX 596	●	●	●	●	€	●
QX 596 AS6	●	●	●	●	€	●
QX 596 V	●	●	●	●	€	●
QX 596 V AS6	●	●	●	●	€	●
QX 676	●	●	●	●	€	●
QX 676 AS6	●	●	●	●	€	●
QX 676 V	●	●	●	●	€	●
QX 676 V AS6	●	●	●	●	€	●
QX 776	●	●	●	●	€	●
QX 776 AS6	●	●	●	●	€	●
QX 776 V	●	●	●	●	€	●
QX 776 V AS6	●	●	●	●	€	●

● Standard

---- Not available

LANE Only with DRF69 - DRF6V

DIV Compulsory for machines > 4,5 m

BT Booster pump included

DVGW Not available with heat recovery and steam condenser
Components prescribed by DVGW on request (check option compatibility with the manufacturer)

	AD	ECO-DET	X-BELT	LANE	DIV	BT	DVGW
Model	Automatic drain	Detergent economizer	Special belt	Cutlery lane	Price for division	Break tank	DVGW
QX 246	●	●	+ 7 %	----	€	€	€
QX 246 AS6	●	●	+ 7 %	----	€	€	€
QX 246 V	●	●	+ 7 %	----	€	€	€
QX 246 V AS6	●	●	+ 7 %	----	€	€	€
QX 376	●	●	+ 7 %	----	€	€	€
QX 376 AS6	●	●	+ 7 %	----	€	€	€
QX 376 V	●	●	+ 7 %	----	€	€	€
QX 376 V AS6	●	●	+ 7 %	----	€	€	€
QX 416	●	●	+ 7 %	+ 5 %	€	€	€
QX 416 AS6	●	●	+ 7 %	----	€	€	€
QX 416 V	●	●	+ 7 %	+ 5 %	€	€	€
QX 416 V AS6	●	●	+ 7 %	----	€	€	€
QX 536	●	●	+ 7 %	----	€	€	€
QX 536 AS6	●	●	+ 7 %	----	€	€	€
QX 536 V	●	●	+ 7 %	----	€	€	€
QX 536 V AS6	●	●	+ 7 %	----	€	€	€
QX 596	●	●	+ 7 %	+ 5 %	€	€	€
QX 596 AS6	●	●	+ 7 %	----	€	€	€
QX 596 V	●	●	+ 7 %	+ 5 %	€	€	€
QX 596 V AS6	●	●	+ 7 %	----	€	€	€
QX 676	●	●	+ 7 %	----	€	€	€
QX 676 AS6	●	●	+ 7 %	----	€	€	€
QX 676 V	●	●	+ 7 %	----	€	€	€
QX 676 V AS6	●	●	+ 7 %	----	€	€	€
QX 776	●	●	+ 7 %	+ 5 %	€	€	€
QX 776 AS6	●	●	+ 7 %	----	€	€	€
QX 776 V	●	●	+ 7 %	+ 5 %	€	€	€
QX 776 V AS6	●	●	+ 7 %	----	€	€	€

Option compatibility to be confirmed by the manufacturer after verification

OPTIONS

	NZ3	NZ6	NZH6	DRF69	DRF6V	ID	DRF70	DRF7V	DRF99M	DRF9VM
Model	Neutral zone 300	Neutral zone 600	Neutral zone for dryer 600	Shelf dryer	Steam-heated shelf dryer	Double skin for dryer	Shelf dryer	Steam-heated shelf dryer	Stage dryer	Steam heated stage dryer
QX 246 - QX 246 AS6	€	€	€	€	----	€	€	----	€	----
QX 246 V - QX 246 V AS6	€	€	€	€	€	€	€	€	€	€
QX 376 - QX 376 AS6	€	€	€	€	----	€	€	----	€	----
QX 376 V - QX 376 V AS6	€	€	€	€	€	€	€	€	€	€
QX 416 - QX 416 AS6	€	€	€	€	----	€	€	----	€	----
QX 416 V - QX 416 V AS6	€	€	€	€	€	€	€	€	€	€
QX 536 - QX 536 AS6	€	€	€	€	----	€	€	----	€	----
QX 536 V - QX 536 V AS6	€	€	€	€	€	€	€	€	€	€
QX 596 - QX 596 AS6	€	€	€	€	----	€	€	----	€	----
QX 596 V - QX 596 V AS6	€	€	€	€	€	€	€	€	€	€
QX 676 - QX 676 AS6	€	€	€	€	----	€	€	----	€	----
QX 676 V - QX 676 V AS6	€	€	€	€	€	€	€	€	€	€
QX 776 - QX 776 AS6	€	€	€	€	----	€	€	----	€	----
QX 776 V - QX 776 V AS6	€	€	€	€	€	€	€	€	€	€

---- Not available


* Available only with AS6

NZ3 Recommended with big quantities of trays to wash


NZ6 Recommended for big quantities of trays to wash. Module equipped with a front door

NZH6 Recommended with dryers with blowers


ID Recommended for DRF69 - DRF6V. Only for shelf dryer



NZ3 + 300 mm
Neutral zone



NZH6 + 600 mm
Neutral zone with door
for dryer




DRF69 9 kW
Shelf dryer

DRF6V
Steam heated shelf dryer

DRF70
Double skin lateral shelf dryer with
upper fan

DRF7V
Steam-heated double skin shelf lateral
dryer with upper fan



DRF99M + 900 mm - 9 kW
Dryer module

DRF9VM + 900 mm
Steam heated dryer module

	DRF99MB	DRF9VMB	SCF10	HRF10	HRF20	HRPF40	3R+	3R+ RO	STOCK
Model	Stage dryer with blowers	Steam heated stage dryer with blowers	Steam condenser	Heat recovery	Heat recovery	Heat recovery	Triple reinforced rinse	Triple reinforced rinse with RO	Chemicals compartment
QX 246 - QX 246 AS6	€	----	€	€	€ *	€ *	€	€	€
QX 246 V - QX 246 V AS6	€	€	€	€	€ *	€ *	€	€	€
QX 376 - QX 376 AS6	€	----	€	€	€	€	€	€	€
QX 376 V - QX 376 V AS6	€	€	€	€	€	€	€	€	€
QX 416 - QX 416 AS6	€	----	€	€	€	€	€	€	€
QX 416 V - QX 416 V AS6	€	€	€	€	€	€	€	€	€
QX 536 - QX 536 AS6	€	----	€	€	€	€	€	€	€
QX 536 V - QX 536 V AS6	€	€	€	€	€	€	€	€	€
QX 596 - QX 596 AS6	€	----	€	€	€	€	€	€	€
QX 596 V - QX 596 V AS6	€	€	€	€	€	€	€	€	€
QX 676 - QX 676 AS6	€	----	€	€	€	€	€	€	€
QX 676 V - QX 676 V AS6	€	€	€	€	€	€	€	€	€
QX 776 - QX 776 AS6	€	----	€	€	€	€	€	€	€
QX 776 V - QX 776 V AS6	€	€	€	€	€	€	€	€	€

DRF99M - DRF9VM

Module with front door

3R+


Reinforced triple rinse: Improved consumptions (with reverse osmosis water on request).

HRF10 - HRF20 - HRPF40


In case of cold water supply for rinse (8-15 °C), we recommend to install the heat recovery system optional.

With osmotic water supply and electrical conductivity lower than 200 microsiemens, it is mandatory to install a stainless steel heat exchanger

Option compatibility to be confirmed by the manufacturer after verification


DRF99MB + 900 mm - 15 kW

Dryer module


DRF9VMB + 900 mm


Steam heated dryer module

HRF10


Compact heat recovery

SCF10

Steam condenser


HRF20

Heat recovery


HRPF40


Heat recovery with heat pump

OPTIONS


	MI900	MI1200	MIS1200	MI1500	MI1800	MI2200	MIR2200
Model	Entry mod. 900	Entry mod. 1200	Over. entry mod. 1200	Entry mod. 1500	Entry mod. 1800	Entry mod. 2200	Lowered belt entry mod. 2200
QX 246 - QX 246 AS6	€	€	●	€	€	€	€
QX 246 V - QX 246 V AS6	€	€	●	€	€	€	€
QX 376 - QX 376 AS6	€	€	●	€	€	€	€
QX 376 V - QX 376 V AS6	€	€	●	€	€	€	€
QX 416 - QX 416 AS6	€	€	●	€	€	€	€
QX 416 V - QX 416 V AS6	€	€	●	€	€	€	€
QX 536 - QX 536 AS6	€	€	●	€	€	€	€
QX 536 V - QX 536 V AS6	€	€	●	€	€	€	€
QX 596 - QX 596 AS6	€	€	●	€	€	€	€
QX 596 V - QX 596 V AS6	€	€	●	€	€	€	€
QX 676 - QX 676 AS6	€	€	●	€	€	€	€
QX 676 V - QX 676 V AS6	€	€	●	€	€	€	€
QX 776 - QX 776 AS6	€	€	●	€	€	€	€
QX 776 V - QX 776 V AS6	€	€	●	€	€	€	€

- Standard
- Upon request
- Not available


Water supply 55 °C. Water hardness min 2°f - max 8°f (if higher, an external water softener is required)
Option compatibility to be confirmed by the manufacturer after verification




Overhanging entry module



Entry module










Lowered belt entry module



Exit module

	MI2700	MIR2700	EM900	EM1200	EM1500	EM1800	EM2200	EM2700
Model	Entry mod. 2700	Lowered belt entry mod. 2700	Exit mod. 900	Exit mod. 1200	Exit mod. 1500	Exit mod. 1800	Exit mod. 2200	Exit mod. 2700
QX 246 - QX 246 AS6	€	€	□	□	□	●	€	€
QX 246 V - QX 246 V AS6	€	€	□	□	□	●	€	€
QX 376 - QX 376 AS6	€	€	□	□	□	●	€	€
QX 376 V - QX 376 V AS6	€	€	□	□	□	●	€	€
QX 416 - QX 416 AS6	€	€	□	□	□	●	€	€
QX 416 V - QX 416 V AS6	€	€	□	□	□	●	€	€
QX 536 - QX 536 AS6	€	€	□	□	□	●	€	€
QX 536 V - QX 536 V AS6	€	€	□	□	□	●	€	€
QX 596 - QX 596 AS6	€	€	□	□	□	●	€	€
QX 596 V - QX 596 V AS6	€	€	□	□	□	●	€	€
QX 676 - QX 676 AS6	€	€	□	□	□	□	●	€
QX 676 V - QX 676 V AS6	€	€	□	□	□	□	●	€
QX 776 - QX 776 AS6	€	€	□	□	□	□	●	€
QX 776 V - QX 776 V AS6	€	€	□	□	□	□	●	€

	Description	Capacity	Dimensions	Code	
	REUSABLE CUP BASKET	5x5 Glass 30 < Ø < 90 mm H max 185 mm	500x500x235 H	C 135 	
	NARROW MESH CUTLERY BASKET		500x500x106 H	C 41	
	LARGE MESH BASKET	For glasses	500x500x105 H	C 44	
	HOLDER FOR GLASS SUPPORT	For glass support (C112-C113-C114)	500x500x50 H	C 111	
	GLASS SUPPORT	5x5 Glass Ø 87 mm (C111)	500x500x50 H	C 112	
	GLASS SUPPORT	4x4 Glass Ø 110 mm (C111)	500x500x50 H	C 113	
	GLASS SUPPORT	6x6 Glass Ø 72 mm (C111)	500x500x50 H	C 114	
	CUTLERY BASKET		490x180x140 H	C 47	