

Ready

Cells

Great performance in an optimal space

The Ready cold rooms make the most of the available space, in the most diverse situations: from the laboratory, to the canteen, to the cooking centre, to the restaurant.

Compatible with all laboratory or oven trolleys, they have been tested in compliance with the EN17032 standard, even with large loads and in the most demanding work situations.



Deep freezing



Continuous cycle



Blast Chilling



Pre-cooling



Defrosting





Plug-ins

A range of blast chilling cells immediately ready to use, because they are equipped with a complete refrigeration unit: an advantage that makes the difference, together with performance, high load capacity, speed of cycles, reduction of consumption and high quality of materials. Just plug them into the power supply and the Ready cells change the way you work: for the better.

STRUCTURAL CHARACTERISTICS

- AISI 304 stainless steel panel construction with 80 mm-thick polyurethane foam insulation
- Stainless steel exterior (Scotch-Brite satin finish)
- Copper-aluminium evaporating coil, cataphoresis-painted with non-toxic epoxy resin, installed on the side, together with fairing that can be opened via a special safety key for easy and proper maintenance; all PED and UL-tested at a pressure of 30 bar
- Highly ventilated evaporator to ensure the cooling system's maximum efficiency
- Anti-condensation heating element fitted under the door seal
- Door with a rubber sweeper seal, complete with closing hinges
- Control-activated chamber sanitisation system with active ions (HI-GIENE)
- Access ramp equipped with a liquid-collecting grille and filtering system (optional)
- External bumper to protect the control panel
- Recessed or above-floor installation possible
- Set up as standard for R452A refrigerant fluid
- Cell fitted with easy-to-clean rounded corners and AISI 304 30/10 stainless steel internal bumpers
- All the surfaces, body's metal components and internal reinforcements are made of AISI 304 stainless steel and have been tested to withstand a saline environment for at least 800 hours
- Easy-to-clean interior, thanks to the suspended evaporator that quickly removes the washing water, according to the indications of the NFS and UNI EN 14159 standards
- Cooling capacity expressed at evaporation temperature -25°C and condensation temperature at $+45^{\circ}\text{C}$

EQUIPPED INTERIOR

- Thick stainless steel internal bumper to prevent any trolley-related damage
- Quick-release heated core probe with 4 measuring points

COMMANDS, CONTROLS AND SAFETY DEVICES

- Connectivity (optional)
- USB connection for uploading and downloading data/recipes
- 5" high-definition TOUCH display
- Automatic storage at the end of the blast chilling cycle
- Electrical connections at the front of the padlocked panel

VERSIONING

- Can be set up for the following eco-friendly gases on request: R404a, R449a, R448a, R507 and R744 (CO₂)

Model **201**
+3 / -40 °C



STANDARD
EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points



Trolleys capacity	n. Tot.	1x GN 1/1 - EN1
Access ramp not included in the price		

Air-cooled condensing unit

RCBL-201-R-PFA

Price	€	Cena na vy-iadanie
Doors numbers	n.	1
External dimensions (WxDxH)	mm [inch]	890 x 1345 x 2400 [35.0 x 53.0 x 94.5]
Packaging module dimensions (WxDxH)	mm [inch]	1150 x 1550 x 2590 [45.3 x 61.0 x 102.0]
No. of packing modules	n.	1
Weight - Net / Gross	Kg [lbs]	570 / 690 [1256.85 / 1521.45]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	90 [198.45]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	50 [110.25]
Cooling power	kW	3,411
Total electric power	kW	3,615
Electrical absorption	A	8.63
Power supply voltage	V - Hz	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.

OPTIONAL TO
BE REQUESTED
WHEN ORDERING


PSC	Opposite hinged door	Cena na vy-iadanie
S-MF1	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-181	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)

RCBL-201-R-PFA	mm [inch]	688 x 835 x 1900 [27.1 x 32.9 x 74.8]
----------------	--------------	--

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).

GN1/1 - EN1



Model 202

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points



Trolleys capacity	n. Tot.	1x GN 2/1 - EN2
Access ramp not included in the price		

Air-cooled condensing unit

RCBL-202-R-PFA

Price	€	Cena na vy-iadanie
Doors numbers	n.	1
External dimensions (WxDxH)	mm [inch]	1100 x 1625 x 2400 [43.3 x 64.0 x 94.5]
Packaging module dimensions (WxDxH)	mm [inch]	1250 x 1760 x 2590 [49.2 x 69.3 x 102.0]
No. of packing modules	n.	1
Weight - Net / Gross	Kg [lbs]	650 / 770 [1433.25 / 1697.85]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	110 [242.55]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	60 [132.30]
Cooling power	kW	3,990
Total electric power	kW	4,500
Electrical absorption	A	10.5
Power supply voltage	V - Hz	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.

OPTIONAL TO BE REQUESTED WHEN ORDERING

PSC	Opposite hinged door	Cena na vy-iadanie
S-MF1	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-182	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)

RCBL-202-R-PFA	mm [inch]	895 x 1040 x 1900 [35.2 x 40.9 x 74.8]
----------------	-----------	--

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).

GN2/1 - EN2



BT - Evap. temp. -25°C / Cond. temp. +45°C

Trolley configuration - image for illustrative purposes only.

Model **201 - R**

+3 / -40 °C

STANDARD
EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity	n. Tot.	1x GN 1/1 - EN1
Access ramp not included in the price		

		Without condensing unit	For remote unit - R744 (CO2)
		RCBL-201-R-PFR	RCBL-201-R-PFR-CO2
Price	€	Cena na vy-iadanie	Cena na vy-iadanie
Doors numbers	n.	1	1
External dimensions (WxDxH)	mm [inch]	890 x 1345 x 2180 [35.0 x 53.0 x 85.8]	890 x 1345 x 2180 [35.0 x 53.0 x 85.8]
Packaging module dimensions (WxDxH)	mm [inch]	2330 x 1200 x 1830 [91.7 x 47.2 x 72.0]	2330 x 1200 x 1830 [91.7 x 47.2 x 72.0]
No. of packing modules	n.	1	1
Weight - Net / Gross	Kg [lbs]	450 / 570 [992.25 / 1256.85]	450 / 570 [992.25 / 1256.85]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	90 [198.45]	90 [198.45]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	50 [110.25]	50 [110.25]
Cooling power	kW	2,170	2,170
Total electric power	kW	0,441	0,441
Electrical absorption	A	2.03	2.03
Power supply voltage	V - Hz	3N-AC 400 V - 50	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.

REMOTE CON-
DENSING UNIT
RECOMMENDED

UMCO41	Remote air-cooled condensing unit (R452A). 3N-AC 400 V - 50 Hz. Tropicalised -10°C / +43°C	Cena na vy-iadanie
UMCO41B	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3-AC 208/230 V - 60 Hz	Cena na vy-iadanie
UMCO41C	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 360/400 V - 60 Hz	Cena na vy-iadanie
UMCO41D	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 440/480 V - 60 Hz	Cena na vy-iadanie

For installations up to 10 linear meters [32.81 ft] (guaranteed max height difference +3 m [9.84 ft])

OPTIONAL TO
BE REQUESTED
WHEN ORDERING

PSC	Opposite hinged door	Cena na vy-iadanie
SM-18	Disassembly	Cena na vy-iadanie
S-MF1	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-181	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)

RCBL-201-R-PFR	mm [inch]	688 x 835 x 1900 [27.1 x 32.9 x 74.8]
RCBL-201-R-PFR-CO2	mm [inch]	688 x 835 x 1900 [27.1 x 32.9 x 74.8]

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).

GN1/1 - EN1



BT - Evap. temp. -25°C / Cond. temp. +45°C

Trolley configuration - image for illustrative purposes only.

Model 202 - R

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity	n. Tot.	1x GN 2/1 - EN2
Access ramp not included in the price		

		Without condensing unit	For remote unit - R744 (CO2)
		RCBL-202-R-PFR	RCBL-202-R-PFR-CO2
Price	€	Cena na vy-iadanie	Cena na vy-iadanie
Doors numbers	n.	1	1
External dimensions (WxDxH)	mm [inch]	1100 x 1625 x 2180 [43.3 x 64.0 x 85.8]	1100 x 1625 x 2180 [43.3 x 64.0 x 85.8]
Packaging module dimensions (WxDxH)	mm [inch]	2330 x 1200 x 1830 [91.7 x 47.2 x 72.0]	2330 x 1200 x 1830 [91.7 x 47.2 x 72.0]
No. of packing modules	n.	1	1
Weight - Net / Gross	Kg [lbs]	480 / 600 [1058.40 / 1323.00]	480 / 600 [1058.40 / 1323.00]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	110 [242.55]	110 [242.55]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	60 [132.30]	60 [132.30]
Cooling power	kW	2,970	2,970
Total electric power	kW	0,531	0,531
Electrical absorption	A	2.3	2.3
Power supply voltage	V - Hz	3N-AC 400 V - 50	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.

REMOTE CONDENSING UNIT RECOMMENDED

UMCO51	Remote air-cooled condensing unit (R452A), 3N-AC 400 V - 50 Hz, Tropicalised -10°C / +43°C	Cena na vy-iadanie
UMCO51B	Remote condensing unit - air - gas R452A - 3-AC 208/230 V - 60 Hz	Cena na vy-iadanie
UMCO51C	Remote condensing unit - air - gas R452A - 3N-AC 360/400 V - 60 Hz	Cena na vy-iadanie
UMCO51D	Remote condensing unit - air - gas R452A - 3N-AC 440/480 V - 60 Hz	Cena na vy-iadanie

For installations up to 10 linear meters [32.81 ft] (guaranteed max height difference +3 m [9.84 ft])

OPTIONAL TO BE REQUESTED WHEN ORDERING

PSC	Opposite hinged door	Cena na vy-iadanie
SM-18	Disassembly	Cena na vy-iadanie
S-MF1	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-182	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)		
RCBL-202-R-PFR	mm [inch]	895 x 1040 x 1900 [35.2 x 40.9 x 74.8]
RCBL-202-R-PFR-CO2	mm [inch]	895 x 1040 x 1900 [35.2 x 40.9 x 74.8]

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).

GN2/1 - EN2



BT - Evap. temp. -25°C / Cond. temp. +45°C

Trolley configuration - image for illustrative purposes only.

Model 201

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity	n. Tot.	1x GN 1/1 - EN1
Access ramp not included in the price		

		1 door	2 ports - pass-through
		RCSG-201-R-RIF	RCSG-201-R-RTF
Price	€	Cena na vy-iadanie	Cena na vy-iadanie
Doors numbers	n.	1	2
External dimensions (WxDxH)	mm [inch]	1300 x 1330 x 2100 [51.2 x 52.4 x 82.7]	1300 x 1400 x 2100 [51.2 x 55.1 x 82.7]
Packing dimensions (WxDxH)	mm [inch]	2400 x 1560 x 1540 [94.5 x 61.4 x 60.6]	2400 x 1560 x 1540 [94.5 x 61.4 x 60.6]
Weight - Net / Gross	Kg [lbs]	450 / 570 [992.25 / 1256.85]	450 / 570 [992.25 / 1256.85]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	120 [264.60]	120 [264.60]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	80 [176.40]	80 [176.40]
Cooling power	kW	6.890	6.890
Total electric power	kW	0.638	0.738
Electrical absorption	A	Cena na vy-iadanie	Cena na vy-iadanie
Power supply voltage	V - Hz	3N-AC 400 V - 50	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.

REMOTE CONDENSING UNIT RECOMMENDED

UMCO35	Remote air-cooled condensing unit (R452A). 3N-AC 400 V - 50 Hz. -10°C / +36°C. Painted steel enclosure	Cena na vy-iadanie
UMCO35T	Remote air-cooled condensing unit (R452A). 3N-AC 400 V - 50 Hz. Tropicalised -10°C / +43°C. Painted steel enclosure	Cena na vy-iadanie
UMCO35B	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3-AC 208/230 V - 60 Hz	Cena na vy-iadanie
UMCO35C	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 360/400 V - 60 Hz	Cena na vy-iadanie
UMCO35D	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 440/480 V - 60 Hz	Cena na vy-iadanie



For installations up to 30 linear meters [98.43 ft] (guaranteed max height difference +3 m [9.84 ft])

OPTIONAL TO BE REQUESTED WHEN ORDERING

WK30035	Winter kit for remote condensing unit - UMC035 - until -30°C	Cena na vy-iadanie
PSC	Opposite hinged door	Cena na vy-iadanie
CD-PSC	Dashboard on the right side and opposite hinged doors (for RTF model)	Cena na vy-iadanie
SM-20	Disassembly	Cena na vy-iadanie
S-MF1	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-201	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)		
RCSG-201-R-RIF	mm [inch]	680 x 950 x 1820 [26.8 x 37.4 x 71.7]
RCSG-201-R-RTF	mm [inch]	680 x 1020 x 1820 [26.8 x 40.2 x 71.7]

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).



Model 202

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity	n. Tot.	1x GN 2/1 - EN2
Access ramp not included in the price		

		1 door	2 ports - pass-through
		RCSG-202-R-RIF	RCSG-202-R-RTF
Price	€	Cena na vy-iadanie	Cena na vy-iadanie
Doors numbers	n.	1	2
External dimensions (WxDxH)	mm [inch]	1500 x 1530 x 2100 [59.1 x 60.2 x 82.7]	1500 x 1600 x 2100 [59.1 x 63.0 x 82.7]
Packing dimensions (WxDxH)	mm [inch]	2400 x 1760 x 1740 [94.5 x 69.3 x 68.5]	2400 x 1760 x 1740 [94.5 x 69.3 x 68.5]
Weight - Net / Gross	Kg [lbs]	500 / 630 [1102.50 / 1389.15]	500 / 630 [1102.50 / 1389.15]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	150 [330.75]	150 [330.75]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	100 [220.50]	100 [220.50]
Cooling power	kW	9,290	9,290
Total electric power	kW	0.638	0.738
Electrical absorption	A	Cena na vy-iadanie	Cena na vy-iadanie
Power supply voltage	V - Hz	3N-AC 400 V - 50	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.

REMOTE CONDENSING UNIT RECOMMENDED

UMCO28	Remote air-cooled condensing unit (R452A). 3N-AC 400 V - 50 Hz. -10°C / +36°C. Painted steel enclosure	Cena na vy-iadanie
UMCO28T	Remote air-cooled condensing unit (R452A). 3N-AC 400 V - 50 Hz. Tropicalised -10°C / +43°C. Painted steel enclosure	Cena na vy-iadanie
UMCO28B	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3-AC 208/230 V - 60 Hz	Cena na vy-iadanie
UMCO28C	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 360/400 V - 60 Hz	Cena na vy-iadanie
UMCO28D	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 440/480 V - 60 Hz	Cena na vy-iadanie


For installations up to 30 linear meters [98.43 ft] (guaranteed max height difference +3 m [9.84 ft])

OPTIONAL TO BE REQUESTED WHEN ORDERING

WK30028	Winter kit for remote condensing unit - UMC028 - until -30°C	Cena na vy-iadanie
PSC	Opposite hinged door	Cena na vy-iadanie
CD-PSC	Dashboard on the right side and opposite hinged doors (for RTF model)	Cena na vy-iadanie
SM-20	Disassembly	Cena na vy-iadanie
S-MF1	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-202	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)		
RCSG-202-R-RIF	mm [inch]	880 x 1150 x 1820 [34.6 x 45.3 x 71.7]
RCSG-202-R-RTF	mm [inch]	880 x 1220 x 1820 [34.6 x 48.0 x 71.7]

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).

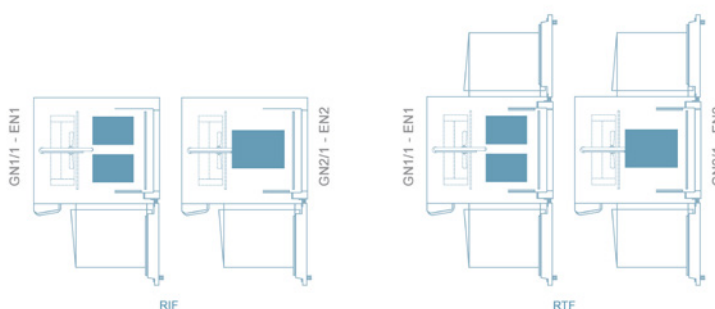

Model 401 +3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C

Trolleys capacity	n. Tot.	2x GN 1/1 - EN1
Access ramp not included in the price		

2 ports - pass-through

RCSG-401-R-RTF

Price	€	Cena na vy-iadanie
Doors numbers	n.	2
External dimensions (WxDxH)	mm [inch]	1300 x 2300 x 2100 [51.2 x 90.6 x 82.7]
Packaging module dimensions (WxDxH)	mm [inch]	2400 x 1560 x 1540 [94.5 x 61.4 x 60.6]
No. of packing modules	n.	2
Weight - Net / Gross	Kg [lbs]	880 / 990 [1940.40 / 2182.95]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	240 [529.20]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	160 [352.80]
Cooling power	kW	12.950
Total electric power	kW	1.276
Electrical absorption	A	Cena na vy-iadanie
Power supply voltage	V - Hz	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.

REMOTE CON- DENSING UNIT RECOMMENDED

UMC003	Remote air-cooled condensing unit (R452A), 3N-AC 400 V - 50 Hz, -10°C / +36°C. Painted steel enclosure	Cena na vy-iadanie
UMC003T	Remote air-cooled condensing unit (R452A), 3N-AC 400 V - 50 Hz. Tropicalised -10°C / +43°C. Painted steel enclosure	Cena na vy-iadanie
UMC404B	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3-AC 208/230 V - 60 Hz	Cena na vy-iadanie
UMC404C	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 360/400 V - 60 Hz	Cena na vy-iadanie
UMC404D	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 440/480 V - 60 Hz	Cena na vy-iadanie

For installations up to 30 linear meters [98.43 ft] (guaranteed max height difference +3 m [9.84 ft])

OPTIONAL TO BE REQUESTED WHEN ORDERING

WK30003	Winter kit for remote condensing unit - UMC003 - until -30°C	Cena na vy-iadanie
PSC	Opposite hinged door	Cena na vy-iadanie
CD-PSC	Dashboard on the right side and opposite hinged doors (for RTF model)	Cena na vy-iadanie
SM-40	Disassembly	Cena na vy-iadanie
S-MF2	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-401	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)

RCSG-401-R-RTF	mm [inch]	680 x 1920 x 1820 [26.8 x 75.6 x 71.7]
----------------	--------------	---

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).



Model 402

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity	n. Tot.	2x GN 2/1 - EN2
Access ramp not included in the price		

2 ports - pass-through

RCSG-402-R-RTF

Price	€	Cena na vy-iadanie
Doors numbers	n.	2
External dimensions (WxDxH)	mm [inch]	1500 x 2700 x 2100 [59.1 x 106.3 x 82.7]
Packaging module dimensions (WxDxH)	mm [inch]	2400 x 1760 x 1740 [94.5 x 69.3 x 68.5]
No. of packing modules	n.	2
Weight - Net / Gross	Kg [lbs]	980 / 1100 [2160.90 / 2425.50]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	300 [661.50]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	200 [441.00]
Cooling power	kW	18.930
Total electric power	kW	1.276
Electrical absorption	A	Cena na vy-iadanie
Power supply voltage	V - Hz	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.

REMOTE CONDENSING UNIT RECOMMENDED

UMC404	Remote air-cooled condensing unit (R452A), 3N-AC 400 V - 50 Hz, -10°C / +36°C. Painted steel enclosure	Cena na vy-iadanie
UMC404T	Remote air-cooled condensing unit (R452A), 3N-AC 400 V - 50 Hz. Tropicalised -10°C / +43°C. Painted steel enclosure	Cena na vy-iadanie
UMC404B	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3-AC 208/230 V - 60 Hz	Cena na vy-iadanie
UMC404C	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 360/400 V - 60 Hz	Cena na vy-iadanie
UMC404D	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 440/480 V - 60 Hz	Cena na vy-iadanie

For installations up to 30 linear meters [98.43 ft] (guaranteed max height difference +3 m [9.84 ft])


OPTIONAL TO BE REQUESTED WHEN ORDERING

WK30404	Winter kit for remote condensing unit - UMC404 - until -30°C	Cena na vy-iadanie
PSC	Opposite hinged door	Cena na vy-iadanie
CD-PSC	Dashboard on the right side and opposite hinged doors (for RTF model)	Cena na vy-iadanie
SM-40	Disassembly	Cena na vy-iadanie
S-MF2	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-402	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)

RCSG-402-R-RTF	mm [inch]	880 x 2320 x 1820 [34.6 x 91.3 x 71.7]
----------------	-----------	--

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).

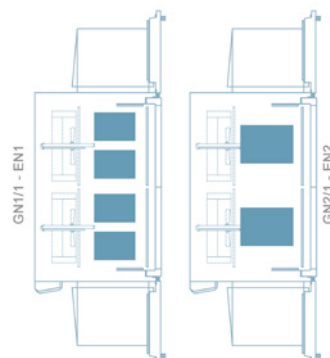

BT - Evap. temp. -25°C / Cond. temp. +45°C

Trolley configuration - image for illustrative purposes only.

Model 601

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C

Trolleys capacity	n. Tot.	3x GN 1/1 - EN1
Access ramp not included in the price		

2 ports - pass-through

RCSG-601-R-RTF

Price	€	Cena na vy-iadanie
Doors numbers	n.	2
External dimensions (WxDxH)	mm [inch]	1300 x 3200 x 2100 [51.2 x 126.0 x 82.7]
Packaging module dimensions (WxDxH)	mm [inch]	2400 x 1560 x 1540 [94.5 x 61.4 x 60.6]
No. of packing modules	n.	3
Weight - Net / Gross	Kg [lbs]	1300 / 1415 [2866.50 / 3120.08]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	360 [793.80]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	240 [529.20]
Cooling power	kW	21.090
Total electric power	kW	1.814
Electrical absorption	A	Cena na vy-iadanie
Power supply voltage	V - Hz	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.

REMOTE CONDENSING UNIT RECOMMENDED

UMCO29	Remote air-cooled condensing unit (R452A), 3N-AC 400 V - 50 Hz, -10°C / +36°C. Painted steel enclosure	Cena na vy-iadanie
UMCO29T	Remote air-cooled condensing unit (R452A), 3N-AC 400 V - 50 Hz. Tropicalised -10°C / +43°C. Painted steel enclosure	Cena na vy-iadanie
UMCO29B	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3-AC 208/230 V - 60 Hz	Cena na vy-iadanie
UMCO29C	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 360/400 V - 60 Hz	Cena na vy-iadanie
UMCO29D	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 440/480 V - 60 Hz	Cena na vy-iadanie

For installations up to 30 linear meters [98.43 ft] (guaranteed max height difference +3 m [9.84 ft])


OPTIONAL TO BE REQUESTED WHEN ORDERING

WK30029	Winter kit for remote condensing unit - UMC029 - until -30°C	Cena na vy-iadanie
PSC	Opposite hinged door	Cena na vy-iadanie
CD-PSC	Dashboard on the right side and opposite hinged doors (for RTF model)	Cena na vy-iadanie
SM-60	Disassembly	Cena na vy-iadanie
S-MF3	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-601	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)

RCSG-601-R-RTF	mm [inch]	680 x 2820 x 1820 [26.8 x 111.0 x 71.7]
----------------	-----------	---

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).

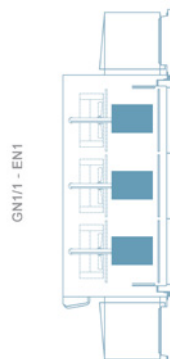

Model 602

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity	n. Tot.	3x GN 2/1 - EN2
Access ramp not included in the price		

2 ports - pass-through

RCSG-602-R-RTF

Price	€	Cena na vy-iadanie
Doors numbers	n.	2
External dimensions (WxDxH)	mm [inch]	1500 x 3800 x 2100 [59.1 x 149.6 x 82.7]
Packaging module dimensions (WxDxH)	mm [inch]	2400 x 1760 x 1740 [94.5 x 69.3 x 68.5]
No. of packing modules	n.	3
Weight - Net / Gross	Kg [lbs]	1450 / 1570 [3197.25 / 3461.85]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	450 [992.25]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	300 [661.50]
Cooling power	kW	27,950
Total electric power	kW	1.814
Electrical absorption	A	Cena na vy-iadanie
Power supply voltage	V - Hz	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.

REMOTE CONDENSING UNIT RECOMMENDED

UMC030	Remote air-cooled condensing unit (R452A), 3N-AC 400 V - 50 Hz, -10°C / +36°C. Painted steel enclosure	Cena na vy-iadanie
UMC030T	Remote air-cooled condensing unit (R452A), 3N-AC 400 V - 50 Hz. Tropicalised -10°C / +43°C. Painted steel enclosure	Cena na vy-iadanie
UMC005C	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 360/400 V - 60 Hz	Cena na vy-iadanie
UMC005D	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 440/480 V - 60 Hz	Cena na vy-iadanie

For installations up to 30 linear meters [98.43 ft] (guaranteed max height difference +3 m [9.84 ft])


OPTIONAL TO BE REQUESTED WHEN ORDERING

WK30030	Winter kit for remote condensing unit - UMC030 - until -30°C	Cena na vy-iadanie
PSC	Opposite hinged door	Cena na vy-iadanie
CD-PSC	Dashboard on the right side and opposite hinged doors (for RTF model)	Cena na vy-iadanie
SM-60	Disassembly	Cena na vy-iadanie
S-MF3	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-602	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)

RCSG-602-R-RTF	mm [inch]	880 x 3420 x 1820 [34.6 x 134.6 x 71.7]
----------------	-----------	---

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).

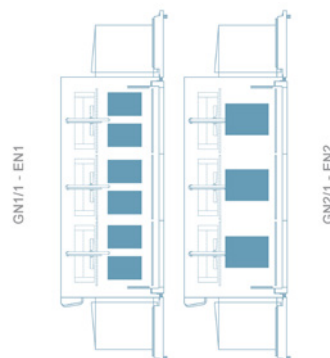

BT - Evap. temp. -25°C / Cond. temp. +45°C

Trolley configuration - image for illustrative purposes only.

Model 801

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity	n. Tot.	4x GN 1/1 - EN1
Access ramp not included in the price		

2 ports - pass-through

RCSG-801-R-RTF

Price	€	Cena na vy-iadanie
Doors numbers	n.	2
External dimensions (WxDxH)	mm [inch]	1300 x 4100 x 2100 [51.2 x 161.4 x 82.7]
Packaging module dimensions (WxDxH)	mm [inch]	2400 x 1560 x 1540 [94.5 x 61.4 x 60.6]
No. of packing modules	n.	4
Weight - Net / Gross	Kg [lbs]	1724 / 1840 [3801.42 / 4057.20]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	480 [1058.40]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	320 [705.60]
Cooling power	kW	30,990
Total electric power	kW	2.232
Electrical absorption	A	Cena na vy-iadanie
Power supply voltage	V - Hz	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.

REMOTE CONDENSING UNIT RECOMMENDED

UMC005	Remote air-cooled condensing unit (R452A), 3N-AC 400 V - 50 Hz, -10°C / +36°C. Painted steel enclosure	Cena na vy-iadanie
UMC005T	Remote air-cooled condensing unit (R452A), 3N-AC 400 V - 50 Hz. Tropicalised -10°C / +43°C. Painted steel enclosure	Cena na vy-iadanie
UMC005C	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 360/400 V - 60 Hz	Cena na vy-iadanie
UMC005D	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 440/480 V - 60 Hz	Cena na vy-iadanie

For installations up to 30 linear meters [98.43 ft] (guaranteed max height difference +3 m [9.84 ft])

OPTIONAL TO BE REQUESTED WHEN ORDERING

WK30005	Winter kit for remote condensing unit - UMC005 - until -30°C	Cena na vy-iadanie
PSC	Opposite hinged door	Cena na vy-iadanie
CD-PSC	Dashboard on the right side and opposite hinged doors (for RTF model)	Cena na vy-iadanie
SM-60	Disassembly	Cena na vy-iadanie
S-MF4	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-601	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)

RCSG-801-R-RTF	mm [inch]	680 x 3720 x 1820 [26.8 x 146.5 x 71.7]
----------------	--------------	--

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).



Model 802

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity	n. Tot.	4x GN 2/1 - EN2
Access ramp not included in the price		

2 ports - pass-through

RCSG-802-R-RTF

Price	€	Cena na vy-iadanie
Doors numbers	n.	2
External dimensions (WxDxH)	mm [inch]	1500 x 4900 x 2100 [59.1 x 192.9 x 82.7]
Packaging module dimensions (WxDxH)	mm [inch]	2400 x 1760 x 1740 [94.5 x 69.3 x 68.5]
No. of packing modules	n.	4
Weight - Net / Gross	Kg [lbs]	1915 / 2040 [4222.57 / 4498.20]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	600 [1323.00]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	400 [882.00]
Cooling power	kW	39,820
Total electric power	kW	2.232
Electrical absorption	A	Cena na vy-iadanie
Power supply voltage	V - Hz	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.

REMOTE CONDENSING UNIT RECOMMENDED

UMC006	Remote air-cooled condensing unit (R452A), 3N-AC 400 V - 50 Hz, -10°C / +36°C. Painted steel enclosure	Cena na vy-iadanie
UMC006T	Remote air-cooled condensing unit (R452A), 3N-AC 400 V - 50 Hz. Tropicalised -10°C / +43°C. Painted steel enclosure	Cena na vy-iadanie
UMC006C	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 360/400 V - 60 Hz	Cena na vy-iadanie
UMC006D	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 440/480 V - 60 Hz	Cena na vy-iadanie

For installations up to 30 linear meters [98.43 ft] (guaranteed max height difference +3 m [9.84 ft])


OPTIONAL TO BE REQUESTED WHEN ORDERING

WK30006	Winter kit for remote condensing unit - UMC006 - until -30°C	Cena na vy-iadanie
PSC	Opposite hinged door	Cena na vy-iadanie
CD-PSC	Dashboard on the right side and opposite hinged doors (for RTF model)	Cena na vy-iadanie
SM-60	Disassembly	Cena na vy-iadanie
S-MF4	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-601	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)

RCSG-802-R-RTF	mm [inch]	880 x 4520 x 1820 [34.6 x 178.0 x 71.7]
----------------	-----------	---

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).

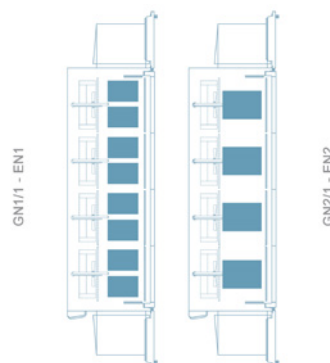

BT - Evap. temp. -25°C / Cond. temp. +45°C

Trolley configuration - image for illustrative purposes only.

Model 202

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity	n. Tot.	1x GN 2/1 - EN2
Access ramp not included in the price		

		1 door	2 ports - pass-through
		RCBP-202-R-RIF	RCBP-202-R-RTF
Price	€	Cena na vy-iadanie	Cena na vy-iadanie
Doors numbers	n.	1	2
External dimensions (WxDxH)	mm [inch]	1500 x 1530 x 2300 [59.1 x 60.2 x 90.6]	1500 x 1600 x 2300 [59.1 x 63.0 x 90.6]
Packing dimensions (WxDxH)	mm [inch]	2600 x 1760 x 1740 [102.4 x 69.3 x 68.5]	2600 x 1760 x 1740 [102.4 x 69.3 x 68.5]
Weight - Net / Gross	Kg [lbs]	500 / 630 [1102.50 / 1389.15]	500 / 630 [1102.50 / 1389.15]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	150 [330.75]	150 [330.75]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	100 [220.50]	100 [220.50]
Cooling power	kW	9290	9290
Total electric power	kW	608	708
Electrical absorption	A	2.74	3.17
Power supply voltage	V - Hz	3N-AC 400 V - 50	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.

REMOTE CONDENSING UNIT RECOMMENDED

UMCO28	Remote air-cooled condensing unit (R452A). 3N-AC 400 V - 50 Hz. -10°C / +36°C. Painted steel enclosure	Cena na vy-iadanie
UMCO28T	Remote air-cooled condensing unit (R452A). 3N-AC 400 V - 50 Hz. Tropicalised -10°C / +43°C. Painted steel enclosure	Cena na vy-iadanie
UMCO28B	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3-AC 208/230 V - 60 Hz	Cena na vy-iadanie
UMCO28C	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 360/400 V - 60 Hz	Cena na vy-iadanie
UMCO28D	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 440/480 V - 60 Hz	Cena na vy-iadanie


For installations up to 30 linear meters [98.43 ft] (guaranteed max height difference +3 m [9.84 ft])

OPTIONAL TO BE REQUESTED WHEN ORDERING

WK30028	Winter kit for remote condensing unit - UMC028 - until -30°C	Cena na vy-iadanie
PSC	Opposite hinged door	Cena na vy-iadanie
CD-PSC	Dashboard on the right side and opposite hinged doors (for RTF model)	Cena na vy-iadanie
SM-20	Disassembly	Cena na vy-iadanie
S-MF1	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-202	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)		
RCBP-202-R-RIF	mm [inch]	880 x 1150 x 2020 [34.6 x 45.3 x 79.5]
RCBP-202-R-RTF	mm [inch]	880 x 1220 x 2020 [34.6 x 48.0 x 79.5]

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).

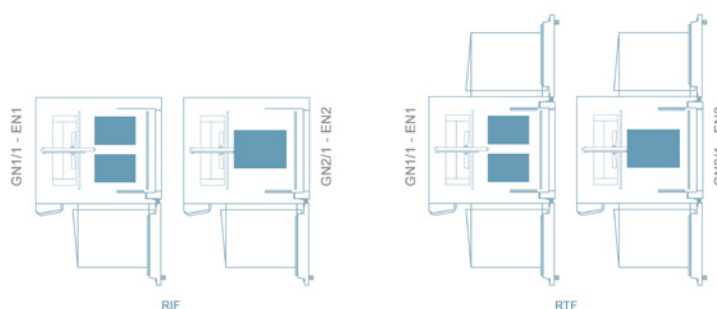

Model 402

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity	n. Tot.	2x GN 2/1 - EN2
Access ramp not included in the price		

2 ports - pass-through

RCBP-402-R-RTF

Price	€	Cena na vy-iadanie
Doors numbers	n.	2
External dimensions (WxDxH)	mm [inch]	1500 x 2700 x 2300 [59.1 x 106.3 x 90.6]
Packaging module dimensions (WxDxH)	mm [inch]	2600 x 2 x 1760 x 1740 [102.4 x NaN x 68.5]
No. of packing modules	n.	2
Weight - Net / Gross	Kg [lbs]	980 / 1100 [2160.90 / 2425.50]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	300 [661.50]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	200 [441.00]
Cooling power	kW	18930
Total electric power	kW	1216
Electrical absorption	A	3.3
Power supply voltage	V - Hz	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.

REMOTE CONDENSING UNIT RECOMMENDED

UMC404	Remote air-cooled condensing unit (R452A), 3N-AC 400 V - 50 Hz, -10°C / +36°C. Painted steel enclosure	Cena na vy-iadanie
UMC404T	Remote air-cooled condensing unit (R452A), 3N-AC 400 V - 50 Hz, Tropicalised -10°C / +43°C. Painted steel enclosure	Cena na vy-iadanie
UMC404B	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3-AC 208/230 V - 60 Hz	Cena na vy-iadanie
UMC404C	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 360/400 V - 60 Hz	Cena na vy-iadanie
UMC404D	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 440/480 V - 60 Hz	Cena na vy-iadanie

For installations up to 30 linear meters [98.43 ft] (guaranteed max height difference +3 m [9.84 ft])


OPTIONAL TO BE REQUESTED WHEN ORDERING

WK30404	Winter kit for remote condensing unit - UMC404 - until -30°C	Cena na vy-iadanie
PSC	Opposite hinged door	Cena na vy-iadanie
CD-PSC	Dashboard on the right side and opposite hinged doors (for RTF model)	Cena na vy-iadanie
SM-40	Disassembly	Cena na vy-iadanie
S-MF2	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-402	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)

RCBP-402-R-RTF	mm [inch]	880 x 2320 x 2020 [34.6 x 91.3 x 79.5]
----------------	-----------	--

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).

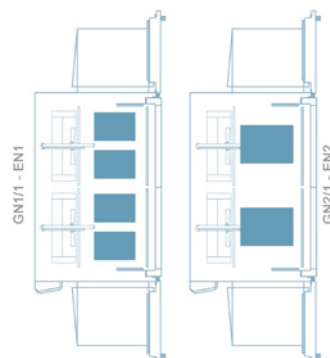

BT - Evap. temp. -25°C / Cond. temp. +45°C

Trolley configuration - image for illustrative purposes only.

Model **602**

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity	n. Tot.	3x GN 2/1 - EN2
Access ramp not included in the price		

2 ports - pass-through

RCBP-602-R-RTF

Price	€	Cena na vy-iadanie
Doors numbers	n.	2
External dimensions (WxDxH)	mm [inch]	1500 x 3800 x 2300 [59.1 x 149.6 x 90.6]
Packaging module dimensions (WxDxH)	mm [inch]	2600 x 3 x 1760 x 1740 [102.4 x NaN x 68.5]
No. of packing modules	n.	3
Weight - Net / Gross	Kg [lbs]	1450 / 1570 [3197.25 / 3461.85]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	450 [992.25]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	300 [661.50]
Cooling power	kW	27950
Total electric power	kW	1724
Electrical absorption	A	3.43
Power supply voltage	V - Hz	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.

REMOTE CONDENSING UNIT RECOMMENDED

UMC030	Remote air-cooled condensing unit (R452A), 3N-AC 400 V - 50 Hz, -10°C / +36°C. Painted steel enclosure	Cena na vy-iadanie
UMC030T	Remote air-cooled condensing unit (R452A), 3N-AC 400 V - 50 Hz. Tropicalised -10°C / +43°C. Painted steel enclosure	Cena na vy-iadanie
UMC005C	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 360/400 V - 60 Hz	Cena na vy-iadanie
UMC005D	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 440/480 V - 60 Hz	Cena na vy-iadanie

For installations up to 30 linear meters [98.43 ft] (guaranteed max height difference +3 m [9.84 ft])


OPTIONAL TO BE REQUESTED WHEN ORDERING

WK30030	Winter kit for remote condensing unit - UMC030 - until -30°C	Cena na vy-iadanie
PSC	Opposite hinged door	Cena na vy-iadanie
CD-PSC	Dashboard on the right side and opposite hinged doors (for RTF model)	Cena na vy-iadanie
SM-60	Disassembly	Cena na vy-iadanie
S-MF3	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-602	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)

RCBP-602-R-RTF	mm [inch]	880 x 3420 x 2020 [34.6 x 134.6 x 79.5]
----------------	--------------	--

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).

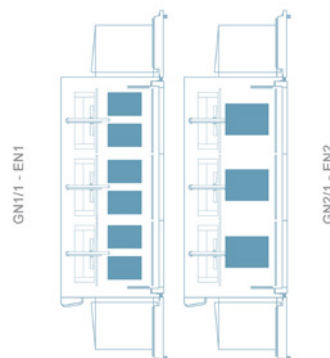

BT - Evap. temp. -25°C / Cond. temp. +45°C

Trolley configuration - image for illustrative purposes only.

Model 802

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity	n. Tot.	4x GN 2/1 - EN2
Access ramp not included in the price		

2 ports - pass-through

RCBP-802-R-RTF

Price	€	Cena na vy-iadanie
Doors numbers	n.	2
External dimensions (WxDxH)	mm [inch]	1500 x 4900 x 2300 [59.1 x 192.9 x 90.6]
Packaging module dimensions (WxDxH)	mm [inch]	2600 x 4 x 1760 x 1740 [102.4 x NaN x 68.5]
No. of packing modules	n.	4
Weight - Net / Gross	Kg [lbs]	1915 / 2040 [4222.57 / 4498.20]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	600 [1323.00]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	400 [882.00]
Cooling power	kW	39820
Total electric power	kW	2232
Electrical absorption	A	5.74
Power supply voltage	V - Hz	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.

REMOTE CONDENSING UNIT RECOMMENDED

UMC006	Remote air-cooled condensing unit (R452A), 3N-AC 400 V - 50 Hz, -10°C / +36°C. Painted steel enclosure	Cena na vy-iadanie
UMC006T	Remote air-cooled condensing unit (R452A), 3N-AC 400 V - 50 Hz, Tropicalised -10°C / +43°C. Painted steel enclosure	Cena na vy-iadanie
UMC006C	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 360/400 V - 60 Hz	Cena na vy-iadanie
UMC006D	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 440/480 V - 60 Hz	Cena na vy-iadanie

For installations up to 30 linear meters [98.43 ft] (guaranteed max height difference +3 m [9.84 ft])


OPTIONAL TO BE REQUESTED WHEN ORDERING

WK30006	Winter kit for remote condensing unit - UMC006 - until -30°C	Cena na vy-iadanie
PSC	Opposite hinged door	Cena na vy-iadanie
CD-PSC	Dashboard on the right side and opposite hinged doors (for RTF model)	Cena na vy-iadanie
SM-60	Disassembly	Cena na vy-iadanie
S-MF4	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-601	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)

RCBP-802-R-RTF	mm [inch]	880 x 4520 x 2020 [34.6 x 178.0 x 79.5]
----------------	-----------	---

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).

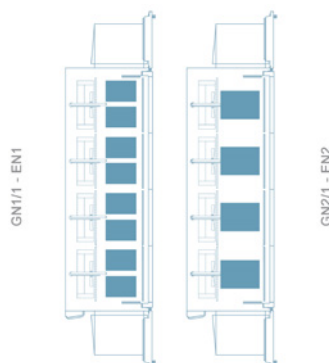

BT - Evap. temp. -25°C / Cond. temp. +45°C

Trolley configuration - image for illustrative purposes only.

Model 201

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity	n. Tot.	1x GN 1/1 - EN1
Access ramp not included in the price		

		1 door	2 ports - pass-through
		RCSG-201-R-RIF-CO2	RCSG-201-R-RTF-CO2
Price	€	Cena na vy-iadanie	Cena na vy-iadanie
Doors numbers	n.	1	2
External dimensions (WxDxH)	mm [inch]	1300 x 1330 x 2100 [51.2 x 52.4 x 82.7]	1300 x 1400 x 2100 [51.2 x 55.1 x 82.7]
Packaging module dimensions (WxDxH)	mm [inch]	2400 x 1560 x 1540 [94.5 x 61.4 x 60.6]	2400 x 1560 x 1540 [94.5 x 61.4 x 60.6]
No. of packing modules	n.	1	1
Weight - Net / Gross	Kg [lbs]	450 / 570 [992.25 / 1256.85]	450 / 570 [992.25 / 1256.85]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	120 [264.60]	120 [264.60]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	80 [176.40]	80 [176.40]
Cooling power	kW	6,890	6,890
Total electric power	kW	0,608	0,708
Electrical absorption	A	2.74	3.18
Power supply voltage	V - Hz	3N-AC 400 V - 50	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm



Special voltages and frequencies on request.

OPTIONAL TO BE REQUESTED WHEN ORDERING

PSC	Opposite hinged door	Cena na vy-iadanie
CD-PSC	Dashboard on the right side and opposite hinged doors (for RTF model)	Cena na vy-iadanie
SM-20	Disassembly	Cena na vy-iadanie
S-MF1	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-201	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)		
RCSG-201-R-RIF-CO2	mm [inch]	680 x 950 x 1820 [26.8 x 37.4 x 71.7]
RCSG-201-R-RTF-CO2	mm [inch]	680 x 1020 x 1820 [26.8 x 40.2 x 71.7]

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).



Model 202

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity n. Tot. 1x GN 2/1 - EN2

Access ramp not included in the price

		1 door	2 ports - pass-through
		RCSG-202-R-RIF-CO2	RCSG-202-R-RTF-CO2
Price	€	Cena na vy-iadanie	Cena na vy-iadanie
Doors numbers	n.	1	2
External dimensions (WxDxH)	mm [inch]	1500 x 1530 x 2100 [59.1 x 60.2 x 82.7]	1500 x 1600 x 2100 [59.1 x 63.0 x 82.7]
Packaging module dimensions (WxDxH)	mm [inch]	2400 x 1760 x 1740 [94.5 x 69.3 x 68.5]	2400 x 1760 x 1740 [94.5 x 69.3 x 68.5]
No. of packing modules	n.	1	1
Weight - Net / Gross	Kg [lbs]	500 / 630 [1102.50 / 1389.15]	500 / 630 [1102.50 / 1389.15]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	150 [330.75]	150 [330.75]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	100 [220.50]	100 [220.50]
Cooling power	kW	9,290	9,290
Total electric power	kW	0,608	0,708
Electrical absorption	A	2.74	3.18
Power supply voltage	V - Hz	3N-AC 400 V - 50	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm


Special voltages and frequencies on request.

OPTIONAL TO BE REQUESTED WHEN ORDERING

PSC	Opposite hinged door	Cena na vy-iadanie
CD-PSC	Dashboard on the right side and opposite hinged doors (for RTF model)	Cena na vy-iadanie
SM-20	Disassembly	Cena na vy-iadanie
S-MF1	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-202	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)		
RCSG-202-R-RIF-CO2	mm [inch]	880 x 1150 x 1820 [34.6 x 45.3 x 71.7]
RCSG-202-R-RTF-CO2	mm [inch]	880 x 1220 x 1820 [34.6 x 48.0 x 71.7]

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).

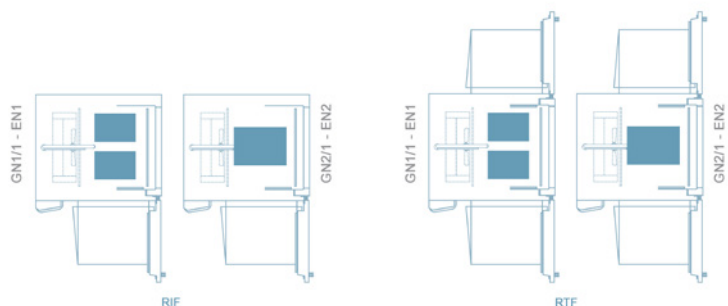

BT - Evap. temp. -25°C / Cond. temp. +45°C

Trolley configuration - image for illustrative purposes only.

Model 401

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity	n. Tot.	2x GN 1/1 - EN1
Access ramp not included in the price		

2 ports - pass-through

RCSG-401-R-RTF-CO2

Price	€	Cena na vy-iadanie
Doors numbers	n.	2
External dimensions (WxDxH)	mm [inch]	1300 x 2300 x 2100 [51.2 x 90.6 x 82.7]
Packaging module dimensions (WxDxH)	mm [inch]	2400 x 2 x 1560 x 1540 [94.5 x NaN x 60.6]
No. of packing modules	n.	2
Weight - Net / Gross	Kg [lbs]	880 / 990 [1940.40 / 2182.95]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	240 [529.20]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	160 [352.80]
Cooling power	kW	12.950
Total electric power	kW	1.216
Electrical absorption	A	3.3
Power supply voltage	V - Hz	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.

OPTIONAL TO BE REQUESTED WHEN ORDERING

PSC	Opposite hinged door	Cena na vy-iadanie
CD-PSC	Dashboard on the right side and opposite hinged doors (for RTF model)	Cena na vy-iadanie
SM-40	Disassembly	Cena na vy-iadanie
S-MF2	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-401	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)

RCSG-401-R-RTF-CO2	mm [inch]	680 x 1920 x 1820 [26.8 x 75.6 x 71.7]
--------------------	-----------	--

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).



Model 402

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity	n. Tot.	2x GN 2/1 - EN2
Access ramp not included in the price		

2 ports - pass-through

RCSG-402-R-RTF-CO2

Price	€	Cena na vy-iadanie
Doors numbers	n.	2
External dimensions (WxDxH)	mm [inch]	1500 x 2700 x 2100 [59.1 x 106.3 x 82.7]
Packaging module dimensions (WxDxH)	mm [inch]	2400 x 2 x 1760 x 1740 [94.5 x NaN x 68.5]
No. of packing modules	n.	2
Weight - Net / Gross	Kg [lbs]	980 / 1100 [2160.90 / 2425.50]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	300 [661.50]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	200 [441.00]
Cooling power	kW	18.930
Total electric power	kW	1.216
Electrical absorption	A	3.3
Power supply voltage	V - Hz	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.


OPTIONAL TO BE REQUESTED WHEN ORDERING

PSC	Opposite hinged door	Cena na vy-iadanie
CD-PSC	Dashboard on the right side and opposite hinged doors (for RTF model)	Cena na vy-iadanie
SM-40	Disassembly	Cena na vy-iadanie
S-MF2	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-402	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)

RCSG-402-R-RTF-CO2	mm [inch]	880 x 2320 x 1820 [34.6 x 91.3 x 71.7]
--------------------	--------------	---

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).

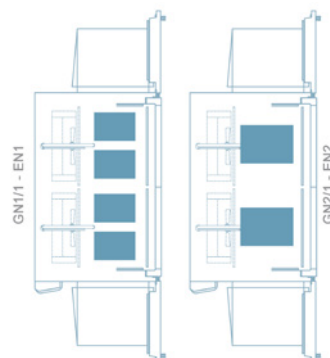

BT - Evap. temp. -25°C / Cond. temp. +45°C

Trolley configuration - image for illustrative purposes only.

Model 601

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity	n. Tot.	3x GN 1/1 - EN1
Access ramp not included in the price		

2 ports - pass-through

RCSG-601-R-RTF-CO2

Price	€	Cena na vy-iadanie
Doors numbers	n.	2
External dimensions (WxDxH)	mm [inch]	1300 x 3200 x 2100 [51.2 x 126.0 x 82.7]
Packaging module dimensions (WxDxH)	mm [inch]	2400 x 3 x 1560 x 1540 [94.5 x NaN x 60.6]
No. of packing modules	n.	3
Weight - Net / Gross	Kg [lbs]	1300 / 1415 [2866.50 / 3120.08]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	360 [793.80]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	240 [529.20]
Cooling power	kW	21.090
Total electric power	kW	1.724
Electrical absorption	A	3.43
Power supply voltage	V - Hz	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.


OPTIONAL TO BE REQUESTED WHEN ORDERING

PSC	Opposite hinged door	Cena na vy-iadanie
CD-PSC	Dashboard on the right side and opposite hinged doors (for RTF model)	Cena na vy-iadanie
SM-60	Disassembly	Cena na vy-iadanie
S-MF3	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-601	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)

RCSG-601-R-RTF-CO2	mm [inch]	680 x 2820 x 1820 [26.8 x 111.0 x 71.7]
--------------------	-----------	---

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).

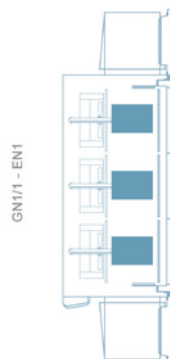

Model 602

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity	n. Tot.	3x GN 2/1 - EN2
Access ramp not included in the price		

2 ports - pass-through

RCSG-602-R-RTF-CO2

Price	€	Cena na vy-iadanie
Doors numbers	n.	2
External dimensions (WxDxH)	mm [inch]	1500 x 3800 x 2100 [59.1 x 149.6 x 82.7]
Packaging module dimensions (WxDxH)	mm [inch]	2400 x 3 x 1760 x 1740 [94.5 x NaN x 68.5]
No. of packing modules	n.	3
Weight - Net / Gross	Kg [lbs]	1450 / 1570 [3197.25 / 3461.85]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	450 [992.25]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	300 [661.50]
Cooling power	kW	27,950
Total electric power	kW	1,724
Electrical absorption	A	3,43
Power supply voltage	V - Hz	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.


OPTIONAL TO BE REQUESTED WHEN ORDERING

PSC	Opposite hinged door	Cena na vy-iadanie
CD-PSC	Dashboard on the right side and opposite hinged doors (for RTF model)	Cena na vy-iadanie
SM-60	Disassembly	Cena na vy-iadanie
S-MF3	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-602	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)

RCSG-602-R-RTF-CO2	mm [inch]	880 x 3420 x 1820 [34.6 x 134.6 x 71.7]
--------------------	--------------	--

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).

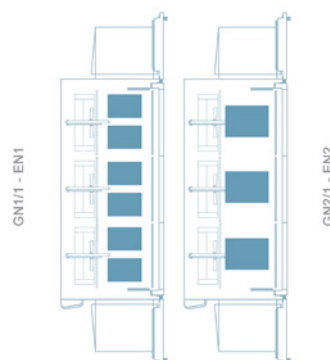

BT - Evap. temp. -25°C / Cond. temp. +45°C

Trolley configuration - image for illustrative purposes only.

Model 801

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity	n. Tot.	4x GN 1/1 - EN1
Access ramp not included in the price		

2 ports - pass-through

RCSG-801-R-RTF-CO2

Price	€	Cena na vy-iadanie
Doors numbers	n.	2
External dimensions (WxDxH)	mm [inch]	1300 x 4100 x 2100 [51.2 x 161.4 x 82.7]
Packaging module dimensions (WxDxH)	mm [inch]	2400 x 4 x 1560 x 1540 [94.5 x NaN x 60.6]
No. of packing modules	n.	4
Weight - Net / Gross	Kg [lbs]	1725 / 1840 [3803.63 / 4057.20]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	480 [1058.40]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	320 [705.60]
Cooling power	kW	30,990
Total electric power	kW	2,232
Electrical absorption	A	5.74
Power supply voltage	V - Hz	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.

OPTIONAL TO BE REQUESTED WHEN ORDERING

PSC	Opposite hinged door	Cena na vy-iadanie
CD-PSC	Dashboard on the right side and opposite hinged doors (for RTF model)	Cena na vy-iadanie
SM-60	Disassembly	Cena na vy-iadanie
S-MF4	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-601	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)

RCSG-801-R-RTF-CO2	mm [inch]	680 x 3720 x 1820 [26.8 x 146.5 x 71.7]
--------------------	--------------	--

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).



Model 802

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity	n. Tot.	4x GN 2/1 - EN2
Access ramp not included in the price		

2 ports - pass-through

RCSG-802-R-RTF-CO2

Price	€	Cena na vy-iadanie
Doors numbers	n.	2
External dimensions (WxDxH)	mm [inch]	1500 x 4900 x 2100 [59.1 x 192.9 x 82.7]
Packaging module dimensions (WxDxH)	mm [inch]	2400 x 4 x 1760 x 1740 [94.5 x NaN x 68.5]
No. of packing modules	n.	4
Weight - Net / Gross	Kg [lbs]	1915 / 2040 [4222.57 / 4498.20]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	600 [1323.00]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	400 [882.00]
Cooling power	kW	39,820
Total electric power	kW	2,232
Electrical absorption	A	5.74
Power supply voltage	V - Hz	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.


OPTIONAL TO BE REQUESTED WHEN ORDERING

PSC	Opposite hinged door	Cena na vy-iadanie
CD-PSC	Dashboard on the right side and opposite hinged doors (for RTF model)	Cena na vy-iadanie
SM-60	Disassembly	Cena na vy-iadanie
S-MF4	KIT BC MINUS FLOOR - Cell floor removal (ATTENTION: inhibits freezing functions while maintaining blast chilling functions).	Cena na vy-iadanie
CA-601	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)

RCSG-802-R-RTF-CO2	mm [inch]	880 x 4520 x 1820 [34.6 x 178.0 x 71.7]
--------------------	-----------	---

Caution! The slope of the ramp affects the maximum usable height for inserting trolleys (-5 cm).

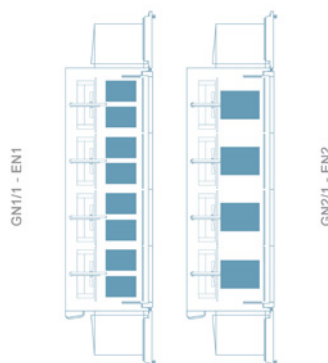

BT - Evap. temp. -25°C / Cond. temp. +45°C

Trolley configuration - image for illustrative purposes only.

Model 201

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity	n. Tot.	1x GN 1/1 - EN1
For oven trolley structure		

		LAINOX OVEN TROLLEY	ICP OVEN TROLLEY
		RCSG-201-R-OTR-L	RCSG-201-R-OTR
Price	€	Cena na vy-iadanie	Cena na vy-iadanie
Doors numbers	n.	1	1
External dimensions (WxDxH)	mm [inch]	1300 x 1305 x 2203 [51.2 x 51.4 x 86.7]	1300 x 1305 x 2203 [51.2 x 51.4 x 86.7]
Packing dimensions (WxDxH)	mm [inch]	2400 x 1560 x 1540 [94.5 x 61.4 x 60.6]	2400 x 1560 x 1540 [94.5 x 61.4 x 60.6]
Weight - Net / Gross	Kg [lbs]	450 / 570 [992.25 / 1256.85]	450 / 570 [992.25 / 1256.85]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	100 [220.50]	100 [220.50]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	70 [154.35]	70 [154.35]
Cooling power	kW	6.890	6.890
Total electric power	kW	0.638	0.638
Electrical absorption	A	Cena na vy-iadanie	Cena na vy-iadanie
Power supply voltage	V - Hz	3N-AC 400 V - 50	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.

REMOTE CONDENSING UNIT RECOMMENDED

UMCO35	Remote air-cooled condensing unit (R452A). 3N-AC 400 V - 50 Hz. -10°C / +36°C. Painted steel enclosure	Cena na vy-iadanie
UMCO35T	Remote air-cooled condensing unit (R452A). 3N-AC 400 V - 50 Hz. Tropicalised -10°C / +43°C. Painted steel enclosure	Cena na vy-iadanie
UMCO35B	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3-AC 208/230 V - 60 Hz	Cena na vy-iadanie
UMCO35C	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 360/400 V - 60 Hz	Cena na vy-iadanie
UMCO35D	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 440/480 V - 60 Hz	Cena na vy-iadanie

For installations up to 30 linear meters [98.43 ft] (guaranteed max height difference +3 m [9.84 ft])

OPTIONAL TO BE REQUESTED WHEN ORDERING

WK30035	Winter kit for remote condensing unit - UMC035 - until -30°C	Cena na vy-iadanie
PSC	Opposite hinged door	Cena na vy-iadanie
SM-20	Disassembly	Cena na vy-iadanie
CA-201	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)

RCSG-201-R-OTR-L	mm [inch]	740 x 940 x 1700 [29.1 x 37.0 x 66.9]
RCSG-201-R-OTR	mm [inch]	740 x 940 x 1700 [29.1 x 37.0 x 66.9]

Model 202

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity	n. Tot.	1x GN 2/1 - EN2
For oven trolley structure		

		LAINOX OVEN TROLLEY	ICP OVEN TROLLEY
		RCSG-202-R-OTR-L	RCSG-202-R-OTR
Price	€	Cena na vy-iadanie	Cena na vy-iadanie
Doors numbers	n.	1	1
External dimensions (WxDxH)	mm [inch]	1500 x 1505 x 2203 [59.1 x 59.3 x 86.7]	1500 x 1505 x 2203 [59.1 x 59.3 x 86.7]
Packing dimensions (WxDxH)	mm [inch]	2400 x 1760 x 1740 [94.5 x 69.3 x 68.5]	2400 x 1760 x 1740 [94.5 x 69.3 x 68.5]
Weight - Net / Gross	Kg [lbs]	500 / 630 [1102.50 / 1389.15]	500 / 630 [1102.50 / 1389.15]
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]	130 [286.65]	130 [286.65]
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]	90 [198.45]	90 [198.45]
Cooling power	kW	9,290	9,290
Total electric power	kW	0.638	0.638
Electrical absorption	A	Cena na vy-iadanie	Cena na vy-iadanie
Power supply voltage	V - Hz	3N-AC 400 V - 50	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.

REMOTE CON- DENSING UNIT RECOMMENDED

UMCO28	Remote air-cooled condensing unit (R452A). 3N-AC 400 V - 50 Hz. -10°C / +36°C. Painted steel enclosure	Cena na vy-iadanie
UMCO28T	Remote air-cooled condensing unit (R452A). 3N-AC 400 V - 50 Hz. Tropicalised -10°C / +43°C. Painted steel enclosure	Cena na vy-iadanie
UMCO28B	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3-AC 208/230 V - 60 Hz	Cena na vy-iadanie
UMCO28C	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 360/400 V - 60 Hz	Cena na vy-iadanie
UMCO28D	Remote condensing unit - air - gas R452A - with painted steel enclosure - 3N-AC 440/480 V - 60 Hz	Cena na vy-iadanie

For installations up to 30 linear meters [98.43 ft] (guaranteed max height difference +3 m [9.84 ft])

OPTIONAL TO BE REQUESTED WHEN ORDERING

WK30028	Winter kit for remote condensing unit - UMC028 - until -30°C	Cena na vy-iadanie
PSC	Opposite hinged door	Cena na vy-iadanie
SM-20	Disassembly	Cena na vy-iadanie
CA-202	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)

RCSG-202-R-OTR-L	mm [inch]	880 x 1140 x 1700 [34.6 x 44.9 x 66.9]
RCSG-202-R-OTR	mm [inch]	880 x 1140 x 1700 [34.6 x 44.9 x 66.9]

BT - Evap. temp. -25°C / Cond. temp. +45°C

Model 201

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity	n. Tot.	1x GN 1/1 - EN1
For oven trolley structure		

		LAINOX OVEN TROLLEY	ICP OVEN TROLLEY
		RCSG-201-R-OTR-L-CO2	RCSG-201-R-OTR-CO2
Price	€	Cena na vy-iadanie	Cena na vy-iadanie
Doors numbers	n.	1	1
External dimensions (WxDxH)	mm [inch]	1300 x 1305 x 2203 [51.2 x 51.4 x 86.7]	1300 x 1305 x 2203 [51.2 x 51.4 x 86.7]
Packaging module dimensions (WxDxH)	mm [inch]	2100 x 1461 x 1676 [82.7 x 57.5 x 66.0]	2100 x 1461 x 1676 [82.7 x 57.5 x 66.0]
No. of packing modules	n.	1	1
Weight - Net / Gross	Kg [lbs]		
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]		
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]		
Cooling power	kW	6,890	6,890
Total electric power	kW	0,608	0,608
Electrical absorption	A	2,74	2,74
Power supply voltage	V - Hz	3N-AC 400 V - 50	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.

OPTIONAL TO BE REQUESTED WHEN ORDERING

PSC	Opposite hinged door	Cena na vy-iadanie
SM-20	Disassembly	Cena na vy-iadanie
CA-201	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)

RCSG-201-R-OTR-L-CO2	mm [inch]	740 x 940 x 1700 [29.1 x 37.0 x 66.9]
RCSG-201-R-OTR-CO2	mm [inch]	740 x 940 x 1700 [29.1 x 37.0 x 66.9]

Model 202

+3 / -40 °C



STANDARD EQUIPMENT

- USB connection for uploads and downloads
- External door protection bumper
- Quick-release heated core probe with 4 measuring points
- Winter kit for remote condensing unit - until -10°C



Trolleys capacity	n. Tot.	1x GN 2/1 - EN2
For oven trolley structure		

		LAINOX OVEN TROLLEY	ICP OVEN TROLLEY
		RCSG-202-R-OTR-L-CO2	RCSG-202-R-OTR-CO2
Price	€	Cena na vy-iadanie	Cena na vy-iadanie
Doors numbers	n.	1	1
External dimensions (WxDxH)	mm [inch]	1500 x 1505 x 2203 [59.1 x 59.3 x 86.7]	1500 x 1505 x 2203 [59.1 x 59.3 x 86.7]
Packaging module dimensions (WxDxH)	mm [inch]	x x [x x]	x x [x x]
No. of packing modules	n.	1	1
Weight - Net / Gross	Kg [lbs]		
Blast Chilling Capacity in 90' +90 / +3°C	Kg [lbs]		
Freezing Capacity in 240' +90 / -18°C	Kg [lbs]		
Cooling power	kW	9,290	9,290
Total electric power	kW	0,608	0,608
Electrical absorption	A	2.74	2.74
Power supply voltage	V - Hz	3N-AC 400 V - 50	3N-AC 400 V - 50

Sample product: unwrapped lean beef tenderloin with a maximum thickness of approx. 5 cm; fresh pastry cake with a maximum thickness of approx. 5 cm

Special voltages and frequencies on request.

OPTIONAL TO BE REQUESTED WHEN ORDERING

PSC	Opposite hinged door	Cena na vy-iadanie
SM-20	Disassembly	Cena na vy-iadanie
CA-202	Wooden crate packaging	Cena na vy-iadanie

Useful internal dimensions (WxDxH)

RCSG-202-R-OTR-L-CO2	mm [inch]	880 x 1140 x 1700 [34.6 x 44.9 x 66.9]
RCSG-202-R-OTR-CO2	mm [inch]	880 x 1140 x 1700 [34.6 x 44.9 x 66.9]

BT - Evap. temp. -25°C / Cond. temp. +45°C

Accessories

CONNECTIVITY		Data	Compatibility	Code	Price €
	Connectivity kit		RCBL-_01, RCBL-_02, RCSG-_01, RCSG-_02, RCBP-_02	IOTK-R	Cena na vy-iadanie
	Coldcloud connection fee - 1 year		RCBL-_01, RCBL-_02, RCSG-_01, RCSG-_02, RCBP-_02	IOTC-1	Cena na vy-iadanie
	Coldcloud connection fee - 3 years		RCBL-_01, RCBL-_02, RCSG-_01, RCSG-_02, RCBP-_02	IOTC-3	Cena na vy-iadanie

RAMPS		Data	Compatibility	Code	Price €
	Access ramp complete with water drainage basin	760 x 930 x 60 mm [29.9 x 36.6 x 2.4 inch]	RCBL-_01, RCSG-_01	RAVD700	Cena na vy-iadanie
	Access ramp complete with water drainage basin	960 x 930 x 60 mm [37.8 x 36.6 x 2.4 inch]	RCBL-_02, RCSG-_02, RCBP-_02	RAVD900	Cena na vy-iadanie

COMPLETION		Data	Compatibility	Code	Price €
	Removable steriliser		RCBL-_01, RCBL-_02, RCSG-_01, RCSG-_02, RCBP-_02	SXIA5	Cena na vy-iadanie

CLEANING		Data	Compatibility	Code	Price €
	Ready-to-use degreasing sanitizing detergent for all washable surfaces. Sui- table for use in the HACCP environment		RCBL-_01, RCBL-_02, RCSG-_01, RCSG-_02, RCBP-_02	SACL	Cena na vy-iadanie