






Self-contained ice maker - Spayer system Daily production up to 76 kg

#### Position n°



#### • Available dice size



23 grams dimensions H 31.5 x L 32.5

# Application fields

Restaurant Fast food Bar		Supermarket SPA Medical	
Disco	•••••	Industry	•••••

#### Features & Plus

- Full cube, strong and crystalline
- Extrernal structure AISI 304 Scotch Brite
- Side grilles for better ventilation
- Removable side panels
- Electromechanical functionning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Cleaning system
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- External protective filter, removable, easy to clean
- Adjustable Stainless Steel feet

#### • Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	7° C	76
21° C	15° C	70
32° C	21° C	62



• Certifications available for this model
























Self-contained ice maker - Spayer system
Daily production up to 76 kg

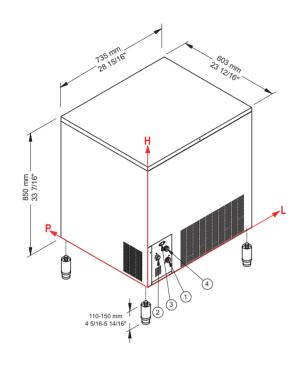

### Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- 1) Water inlet: 135 mm - 122 mm - 3/4"
- ② Water outlet: 62 mm - 182 mm - 24 mm
- ③ Electrical connection: 100 mm - 252 mm
- 4 Condenser water inlet (only W): 124 mm 208 mm 3/4"

## Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

## • Technical information

Production in 24h	70 kg
Store capacity, up to	40 kg
Cooling system	A - W
Kind of cube	23 g
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	590 W
Fuse	10 A
Water consumption	A: 4 l/kg
	W: 16 l/kg
Sizes (L-P-H mm)	735 - 603 - 850
Sizes with pack (L-P-H r	mm) <b>780 - 640 - 1015</b>
Net weight	67 kg
Gross weight	79 kg
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:



Sizes without

feet




(23g)



+21° C







voltage)

Models and specifications are subject to change without notice Rev. 03 - Issued January 2025





