

SL 90
R290



FROZEN QUBE




Self-contained ice maker - Spayer system
Daily production up to 52 kg

• Position n°



• Available dice size



23 grams
dimensions H 31.5 x L 32.5

• Application fields

| | | | |
|------------|-----------------|-------------|-----------------|
| Hotel | ● ● ● ● ● ● ● ● | Fish market | ● ● ● ● ● ● ● ● |
| Restaurant | ● ● ● ● ● ● ● ● | Supermarket | ● ● ● ● ● ● ● ● |
| Fast food | ● ● ● ● ● ● ● ● | SPA | ● ● ● ● ● ● ● ● |
| Bar | ● ● ● ● ● ● ● ● | Medical | ● ● ● ● ● ● ● ● |
| Disco | ● ● ● ● ● ● ● ● | Industry | ● ● ● ● ● ● ● ● |

• Features & Plus

- Full cube, strong and crystalline
- External structure AISI 304 Scotch Brite
- Side grilles for better ventilation
- Removable side panels
- Electromechanical functioning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Cleaning system
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- External protective filter, removable, easy to clean
- Adjustable Stainless Steel feet
- Undercounter model

• Prod. 24h

| Air temp. | Water temp. | Prod. 24h kg |
|-----------|-------------|--------------|
| 10° C | 7° C | 52 |
| 21° C | 15° C | 49 |
| 32° C | 21° C | 42 |

2 Years
Warranty

subject to limitations

• Certifications available for this model



www.bremagroup.it
info@bremaicegroup.it




SL 90
R290



FROZEN QUBE



Self-contained ice maker - Spayer system
Daily production up to 52 kg

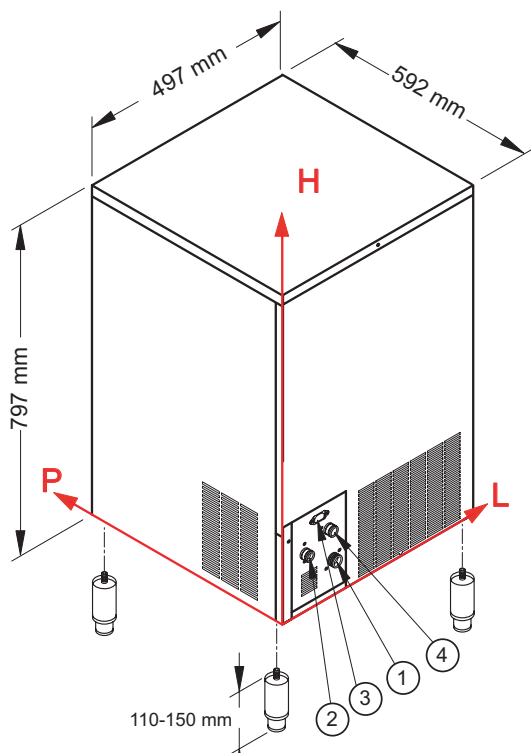

• Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet:
130 mm - 95 mm - 3/4"
- ② Water outlet:
56 mm - 155 mm - 24 mm
- ③ Electrical connection:
95 mm - 225 mm
- ④ Condenser water inlet (only W):
119 mm - 181 mm - 3/4"

• Working conditions

- Location: Indoor

| | Min | Max |
|----------------------|---------------|---------------|
| Ambient temperature | +10° C | +43° C |
| Water temperature | +3° C | +32° C |
| Voltage | -10% | +10% |
| Water inlet pressure | 1bar (14 psi) | 6bar (84 psi) |

• Technical information

| | |
|----------------------------|--|
| Production in 24h | 49 kg |
| Store capacity, up to | 25 kg |
| Cooling system | A - W |
| Kind of cube | 23 g |
| Refrigerant | R290 |
| Standard voltage | 220-240 V ~ 50 Hz |
| Electrical consumption | 450 W |
| Fuse | 10 A |
| Water consumption | A: 3 l/kg W: 15 l/kg |
| Sizes (L-P-H mm) | 497 - 592 - 797 |
| Sizes with pack (L-P-H mm) | 550 - 660 - 970 |
| Net weight | 46 kg |
| Gross weight | 54 kg |
| Finish | AISI 304 stainless steel, scotch brite |

All the technical information must be considered
at the following conditions:

| | | | | |
|-----------------------|--------------------|----------------------------------|--------------------------------|---|
| | | | | |
| Sizes without feet | Full Cube (23g) | Ambient temperature +21° C | Water temperature +15° C | Electrical consumption at +43° C (standard voltage) |

Models and specifications are subject to change without notice
Rev. 03 - Issued January 2025



www.bremagroup.it
info@bremaicegroup.it

