






Self-contained ice maker - Spayer system Daily production up to 47 kg

#### Position n°



#### • Available dice size





## Application fields

Restaurant Fast food Bar		Supermarket SPA Medical	
Disco	••••••	Industry	•••••

#### Features & Plus

- Full cube, compact and crystalline
- Extrernal structure AISI 304 Scotch Brite
- Side grilles for better ventilation
- Removable side panels
- Electromechanical functionning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Cleaning system
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- Adjustable Stainless Steel feet
- Undercounter model

### • Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	7° C	47
21° C	15° C	45
32° C	21° C	38



• Certifications available for this model
























Self-contained ice maker - Spayer system Daily production up to 47 kg

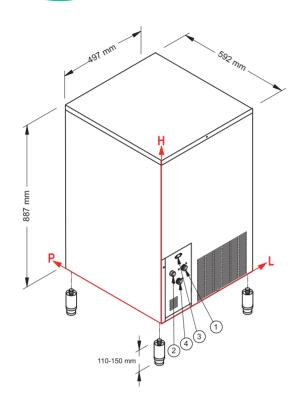

### Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet: 130 mm - 240 mm - 3/4"
- ② Water outlet: 56 mm - 245 mm - 24 mm
- ③ Electrical connection: 95 mm 315 mm
- 4 Condenser water inlet (only W): 93 mm 180 mm 3/4"

# Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

#### • Technical information

Production in 24h	45 kg
Store capacity, up to	25 kg
Cooling system	A - W
Kind of cube	14- <b>17</b> -32-41g
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	460 W
Fuse	10 A
Water consumption	A: 4 l/kg
	W: 15 l/kg
Sizes (L-P-H mm)	497 - 592 - 887
Sizes with pack (L-P-H r	mm) 550 - 660 - 1060
Net weight	55 kg
Gross weight	64 kg
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:











Sizes without feet

ut Standard Cube (17 g) Ambient temperature +21° C

Water temperature +15° C Electrical consumption at +43° C (standard

Models and specifications are subject to change without notice Rev. 03 - Issued January 2025





