





Self-contained ice maker - Spayer system Daily production up to 22 kg

#### Position n°



#### • Available dice size





## Application fields

Restaurant Fast food		Supermarket SPA	
Bar	••••••	Medical	
Disco	•••••	Industry	•••••

#### Features & Plus

- Full cube, compact and crystalline
- Extrernal structure AISI 304 Scotch Brite
- External structure ABS (on demand)
- Electromechanical functionning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Cleaning system
- Cleanable antiscale filter
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- Undercounter model

#### • Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	7° C	22
21° C	15° C	20
32° C	21° C	16



• Certifications available for this model
























Self-contained ice maker - Spayer system Daily production up to 22 kg

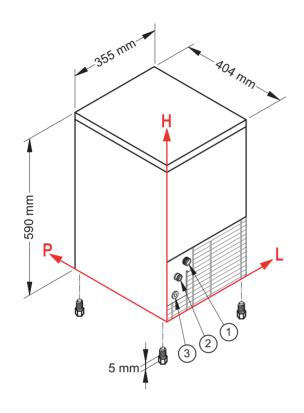

### Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet: 88 mm - 184 mm - 3/4"
- 2 Water outlet: 45 mm - 138 mm - 24mm
- ③ Electrical connection: 41 mm - 73 mm

# Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

#### • Technical information

Production in 24h	20 kg	
Store capacity, up to	4 kg	
Cooling system	A - W	
Kind of cube	14 g	
Refrigerant	R290	
Standard voltage	220-240 V ~ 50 Hz	
Electrical consumption	260 W	
Fuse	10 A	
Water consumption	A: 4 l/kg	
	W: 27 l/kg	
Sizes (L-P-H mm)	355 - 404 - 590	
Sizes with pack (L-P-H mm)	415 - 445 - 780	
Net weight	27,5 kg	
Gross weight	34 kg	
Finish	AISI 304 stainless steel,	
	scotch brite - ABS	

All the technical information must be considered at the following conditions:











Sizes without feet

Standard Cube (14 g) Ambient temperature +21° C

vient Water rature temperature ° C +15° C Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice Rev. 03 - Issued January 2025





