






Self-contained ice maker - Spayer system Daily production up to 33 kg

Position n°



• Available dice size





Application fields

Restaurant Fast food Bar		Supermarket SPA Medical	
Disco	••••••	Industry	• • • • • • • •

Features & Plus

- Full cube, compact and crystalline
- Extrernal structure AISI 304 Scotch Brite
- Side grilles for better ventilation
- Removable side panels
- Electromechanical functionning
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Cleaning system
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Easy cleaning thanks to rounded surfaces
- Model in Tropical Class + 43 ° C
- External protective filter, removable, easy to clean
- Undercounter model

• Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	7° C	33
21° C	15° C	30
32° C	21° C	24



• Certifications available for this model
























Self-contained ice maker - Spayer system Daily production up to 33 kg

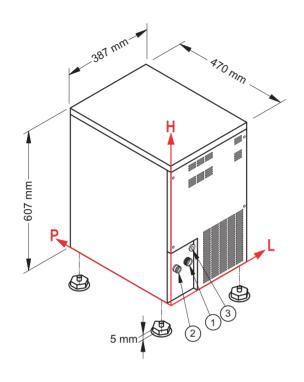

Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet: 130 mm - 145 mm - 3/4"
- (2) Water outlet: 49 mm - 140 mm - 24mm
- 3 Electrical connection: 95 mm - 209 mm

Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

• Technical information

Production in 24h	30 kg	
Store capacity, up to	6 kg	
Cooling system	A - W	
Kind of cube	14- 17 -32-41g	
Refrigerant	R290	
Standard voltage	220-240 V ~ 50 Hz	
Electrical consumption	270 W	
Fuse	10 A	
Water consumption	A: 2,5 l/kg	
	W: 12 l/kg	
Sizes (L-P-H mm)	387 - 470 - 607	
Sizes with pack (L-P-H r	mm) 440 - 520 - 780	
Net weight	31 kg	
Gross weight	37 kg	
Finish	AISI 304 stainless steel, scotch brite	

All the technical information must be considered at the following conditions:











Sizes without feet

Standard Cube (17 g)

Ambient temperature

Water temperature +21° C +15° C

Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice Rev. 03 - Issued January 2025





