



Position n°

# • Application fields



# • Features & Plus

- Granular ice
- Low consumption (1 liter water / 1 kg ice) aircooled vers.
- Electromechanical functionning
- Extrernal structure AISI 304 Scotch Brite
- Evaporator AISI 304, auger AISI 303 made
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Dust proof water basin
- Automatic water charge
- Easy cleaning thanks to rounded surfaces
- External protective filter, removable, easy to clean
- Removable side panels
- Internal bin insulation HCFC free
- Model in Tropical Class + 43 ° C
- Conformity to RoHS directive
- Adjustable Stainless Steel feet
- Undercounter model

### • Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	7° C	123
21° C	15° C	111
32° C	21° C	87

2 Years

subject to limitations

Warranty

Certifications available for this model

A





(E 🍥






SLF 225 R290





#### Self-contained ice maker - Granular system Daily production up to 123 kg

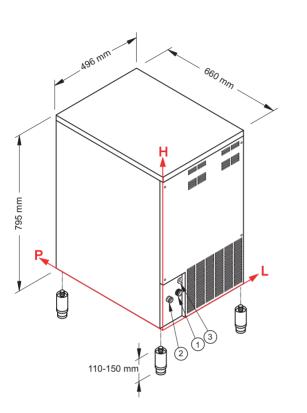

#### Connections

All measures are referred to the rear bottom-left corner (L-H- $\emptyset$ )

- ① Water inlet: 105 mm - 135 mm - 3/4"
- 2 Water outlet:
- 55 mm 140 mm 24 mm
- ③ Electrical connection: 115 mm - 220 mm

### • Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

### • Technical information

Production in 24h	111 kg
Store capacity, up to	28 kg
Cooling system	A - W
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	470 W
Fuse	10 A
Water consumption	A: 1 l/kg
	W: 7 l/kg
Sizes (L-P-H mm)	496 - 660 - 795
Sizes with pack (L-P-H n	nm) <b>550 - 720 - 990</b>
Net weight	63 kg
Gross weight	74 kg
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:



Sizes without

feet



Ambient temperature

+21° C

Water temperature c +15° C

Electrical consumption at +43° C (standard voltage)

n n

Models and specifications are subject to change without notice Rev. 03 - Issued January 2025



www.bremagroup.it info@bremaicegroup.it



