





Self-contained ice maker - Granular system Daily production up to 173 kg

Position n°



Application fields

	• • • • • • •		••••••
Bar	•••••	Medical	•••••
Disco		Industry	

Features & Plus

- Granular ice
- Low consumption (1 liter water / 1 kg ice) aircooled vers.
- Electromechanical functionning
- Extrernal structure AISI 304 Scotch Brite
- Evaporator AISI 304, auger AISI 303 made
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Dust proof water basin
- Automatic water charge
- Easy cleaning thanks to rounded surfaces
- External protective filter, removable, easy to clean
- Removable side panels
- Internal bin insulation HCFC free
- Model in Tropical Class + 43 ° C
- Conformity to RoHS directive
- Adjustable Stainless Steel feet

• Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	7° C	173
21° C	15° C	150
32° C	21° C	137



• Certifications available for this model
























Self-contained ice maker - Granular system Daily production up to 173 kg

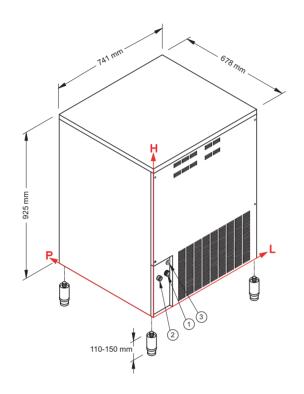

Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet: 120 mm - 230 mm - 3/4"
- ② Water outlet: 65 mm - 245 mm - 24 mm
- ③ Electrical connection: 130 mm 310 mm

Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

• Technical information

150 kg	
38 kg	
A - W	
R290	
220-240 V ~ 50 Hz	
700 W	
10 A	
A: 1 l/kg	
W: 7 l/kg	
741 - 678 - 925	
mm) 800 - 750 - 1055	
85 kg	
95 kg	
AISI 304 stainless steel, scotch brite	

All the technical information must be considered at the following conditions:



Sizes without feet



Ambient temperature +21° C



Water temperature +15° C



Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice Rev. 03 - Issued January 2025





