



# • Features & Plus

- Granular ice

Restaurant

Fast food

Bar

Disco

- Low consumption (1 liter water / 1 kg ice) - aircooled vers.

Supermarket SPA

Medical

Industry

- Electromechanical functionning
- Extrernal structure AISI 304 Scotch Brite
- Evaporator AISI 304, auger AISI 303 made

....

....

 $\bullet \bullet \bullet \bullet \bullet \bullet \bullet \bullet \bullet$ 

.....

- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Dust proof water basin
- Automatic water charge
- Easy cleaning thanks to rounded surfaces
- External protective filter, removable, easy to clean
- Removable side panels
- Internal bin insulation HCFC free
- Model in Tropical Class + 43 ° C
- Conformity to RoHS directive
- Adjustable Stainless Steel feet

### • Prod. 24h

FAL

Air temp.	Water temp.	Prod. 24h kg
10° C	7° C	173
21° C	15° C	150
32° C	21° C	137

2 Years

subject to limitations

Warranty

• Certifications available for this model

A





(E 🍥








SLF 355 R290





#### Self-contained ice maker - Granular system Daily production up to 173 kg

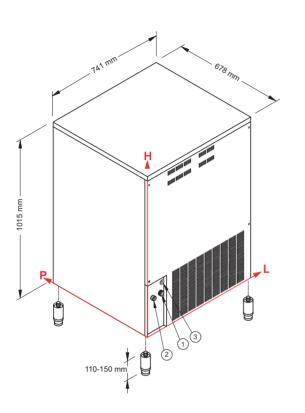

#### Connections

All measures are referred to the rear bottom-left corner (L-H- $\emptyset$ )

- 1 Water inlet:
  - 120 mm 230 mm 3/4"
- 2 Water outlet:65 mm 245 mm 24 mm
- ③ Electrical connection: 130 mm - 310 mm

# • Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

## • Technical information

Production in 24h	150 kg
Store capacity, up to	55 kg
Cooling system	A - W
Refrigerant	R290
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	700 W
Fuse	10 A
Water consumption	A: 1 l/kg
	W: 7 l/kg
Sizes (L-P-H mm)	741 - 678 - 1015
Sizes with pack (L-P-H r	mm) 800 - 750 - 1150
Net weight	87kg
Gross weight	98 kg
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:

Ambient

temperature

+21° C



Sizes without

feet



Water

temperature

+15° C

Electrical consumption

at +43° C (standard voltage)

ΠΩ

Models and specifications are subject to change without notice Rev. 03 - Issued January 2025



www.bremagroup.it info@bremaicegroup.it



