


ROBUST AND ESSENTIAL GLASS & DISHWASHERS

Range: CS

You asked and we listened! We are thrilled to announce our brand new range: CS.

These robust and essential glass and dishwashers simply make sense. Nothing superfluous: solid S/S body with double skin door, sloped tank, innovative and light arms, controlled temperatures and, only if needed, detergent dispenser and drain pump.

Wash, rinse, restart. It is really that simple.

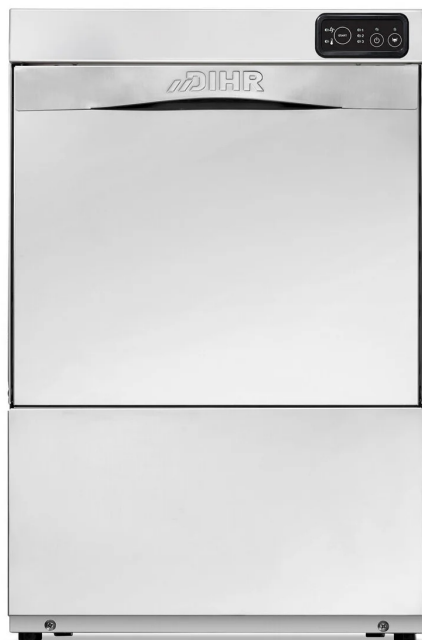

FEATURES

- Intuitive LED control panel displaying the temperatures of both tank and boiler
- Solid structure in AISI 304 S/S
- Sound and heat proof double skin door
- Door with anti-shock system
- Sloped tank with screwed basket rails
- Non-drip roof to safeguard the hygiene of the freshly washed dishes
- Light rinse arms granting the best efficiency also in the event of weak pressure in the water mains
- Easy to remove nozzles to help with daily cleaning operations
- Overflow and drain pipes integrated system for a triple protection of the wash pump
- 3 wash cycles
- Self-cleaning cycle
- Non-return valve to prevent the water backflow
- Thermostop system: the rinse starts only when the water in boiler reaches 85 °C
- Rinse aid dispenser

OPTIONS

- Upper wash arms to wash plates (LS version). Maximum dish diameter 295mm
- Round basket
- Built-in peristaltic detergent dispenser
- Drain pump

Option compatibility to be confirmed by the manufacturer after verification

CAPACITY



305 H




400x400

RACK EQUIPMENT

- 2 X C121
- 1 X 10728
- 1 X 15060



ROBUST AND ESSENTIAL GLASS & DISHWASHERS

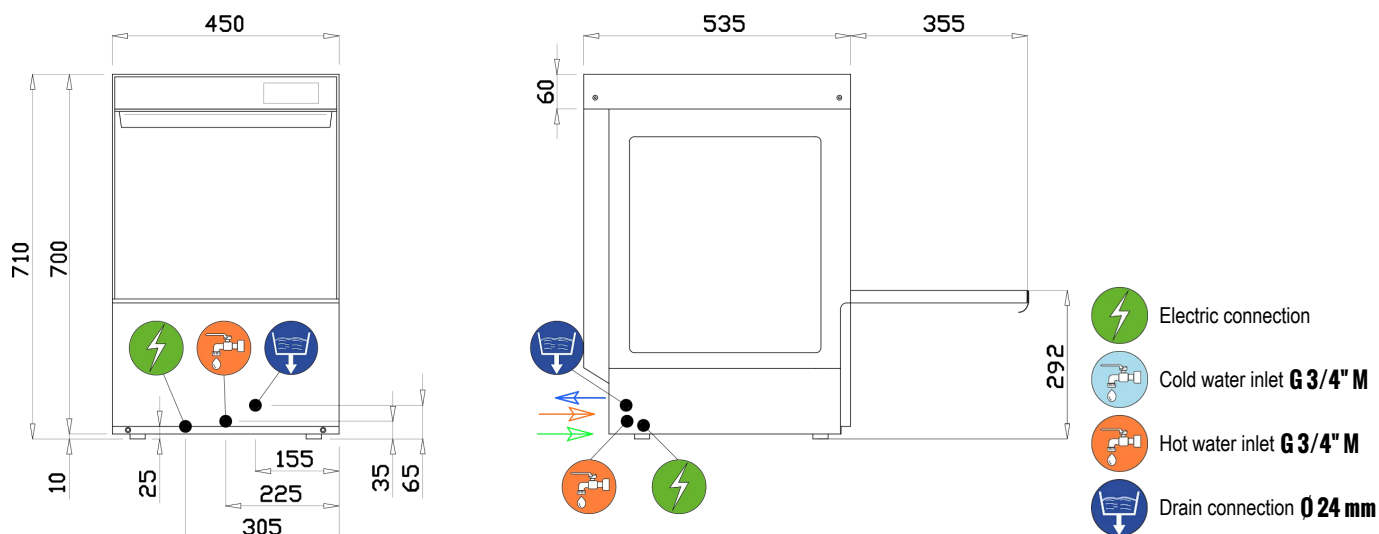

TECHNICAL FEATURES

EXTERNAL DIMENSIONS

Width	mm	450
Depth	mm	535
Height (screwed foot)	mm	710
Weight (standard version)	kg	37

TECHNICAL DATA

Basket dimensions	mm	400x400
Glasses maximum useful height	mm	305
Maximum level of water discharge	mm	65
Water inlet temperature	°C	55
Maximum inlet water hardness	°f	8
Inlet water pressure	kPa	200 - 400
Tank capacity	l	14.5
Tank heating element	kW	1.25
Boiler capacity	l	3.4
Boiler heating element	kW	2.4
Wash pump power	kW	0.19
Wash pump flow rate	l/min	120
Sound pressure level	dB(A)	< 70

POWER SUPPLY DATA

Supply voltage		220-240 V 50 Hz
Total installed power	kW	2.59

ROBUST AND ESSENTIAL GLASS & DISHWASHERS

CYCLES				
Cycle number		1	2	3
Cycle length	s	90	120	180
Cycle productivity (racks/h) - 55°C inlet water		31	30	20
Cycle productivity (racks/h) - 10°C inlet water		14	14	14
Cycle water consumption	l	1.8 (minimum pressure)	1.8 (minimum pressure)	1.8 (minimum pressure)
Rinsing temperature setting	°C	85	85	85
Washing temperature setting	°C	55	55	55

Standard Thermostop. In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.