

GLASS & DISHWASHERS WITH DOUBLE SKIN DOOR

Range: GS

The glass and dishwashers of the GS series are ideal for bars, pubs, restaurants and hotels.

These undercounter machines, with a redesigned control panel, feature a wide loading capacity granting the highest performance at a reasonable price. According to the user's needs the machine can be customized thanks to many optional features such as water softener, detergent dispenser and drain pump.



FEATURES

- Solid structure in AISI 304 S/S
- Sound and heat proof double skin door
- Door with anti-shock system
- Deep-drawn and sloped tank for a perfect total drain
- Non-drip roof to safeguard the hygiene of the freshly washed dishes
- Light rinse arms granting the best efficiency also in the event of weak pressure in the water mains
- Easy to remove nozzles to help with daily cleaning operations
- Overflow and drain pipes integrated system for a triple protection of the wash pump
- Non-return valve to prevent the water backflow
- Thermostop system: the rinse starts only when the water in boiler reaches 85 °C
- Rinse aid dispenser


OPTIONS

- Special voltages
- Drain pump
- Built-in peristaltic detergent dispenser
- Peristaltic rinse aid dispenser
- Final rinse with cold water
- Round basket
- Built-in water softener
- Upper wash arms (plates with a maximum diameter of 280 mm)

Option compatibility to be confirmed by the manufacturer after verification

CAPACITY		RACK EQUIPMENT
		• 2 X C10 • 1 X 10728 • 1 X 15060
275 H	370x370	

GLASS & DISHWASHERS WITH DOUBLE SKIN DOOR

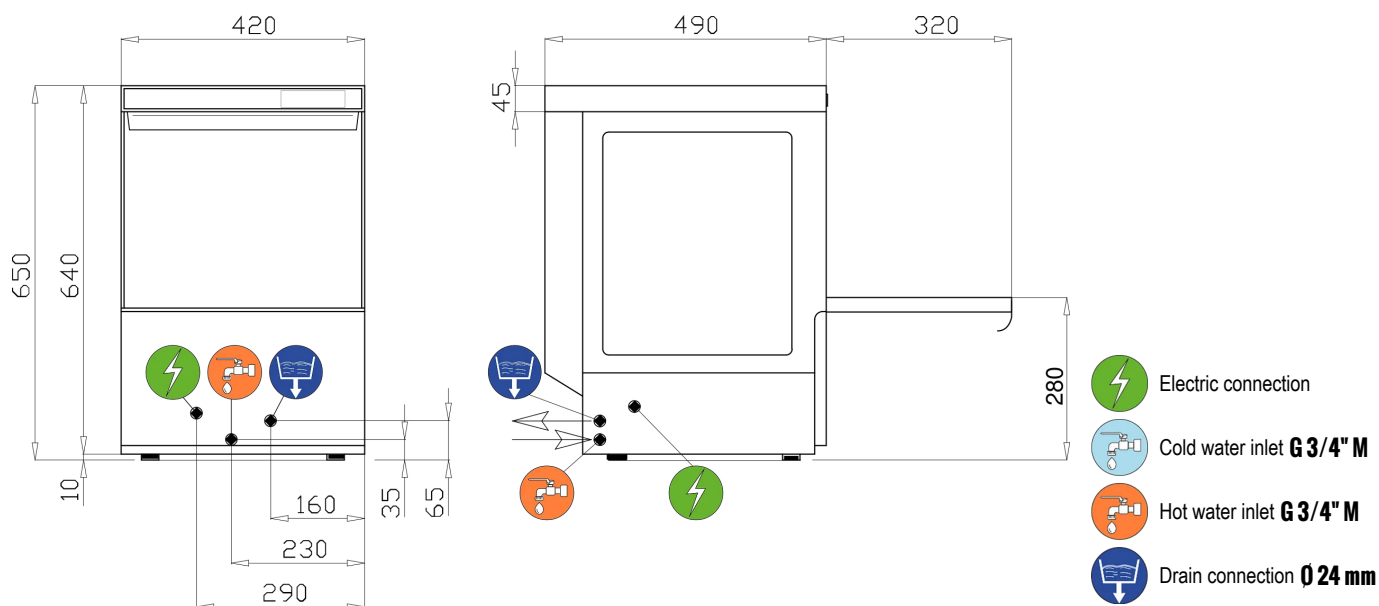

TECHNICAL FEATURES

EXTERNAL DIMENSIONS

Width	mm	420
Depth	mm	490
Height (screwed foot)	mm	650
Weight (standard version)	kg	30

TECHNICAL DATA

Basket dimensions	mm	370x370
Glasses maximum useful height	mm	275
Maximum level of water discharge	mm	65
Water inlet temperature	°C	55
Maximum inlet water hardness	°f	8
Inlet water pressure	kPa	200 - 400
Tank capacity	l	12.5
Tank heating element	kW	1.25
Boiler capacity	l	3
Boiler heating element	kW	2.4
Wash pump power	kW	0.19
Wash pump flow rate	l/min	120
Sound pressure level	dB(A)	< 70

POWER SUPPLY DATA

Supply voltage		220-240 V 50 Hz
Total installed power	kW	2.59

GLASS & DISHWASHERS WITH DOUBLE SKIN DOOR

CYCLES		
Cycle number		1
Cycle length	s	120
Cycle productivity (racks/h) - 55°C inlet water		30
Cycle productivity (racks/h) - 10°C inlet water		14
Cycle water consumption	l	1.8 (minimum pressure)
Rinsing temperature setting	°C	85
Washing temperature setting	°C	55

Standard Thermostop. In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.