

Range: LP

Introducing our wide range of professional warewashers, designed to meet the needs of every sector, from catering to industry. The LP line includes versatile solutions, designed to ensure impeccable hygiene and thorough cleaning of different types of objects, without compromising efficiency and ease of use.

Whether we talk of catering, pastry laboratories or industries, our goal is to provide tools that improve productivity and respond to daily challenges. The LP range can transform the way you work, facilitating cleaning operations and ensuring high hygiene standards.

Let yourself be inspired by the endless possibilities we offer for a professional, efficient and tailor-made washing experience for your needs.



FEATURES

- LED control panel with 4 customizable cycles
- Max loading 805 mm
- Double skin door
- Double tank filter + pump filter
- Deep-drawn tank
- Standard booster pump
- Anti-drop roof panel
- Self-cleaning cycle
- 550x665 mm rack
- S/S wash and rinse arms

OPTIONS

- Special voltages
- Additional boiler power for cold water supply
- Drain pump
- Built-in peristaltic detergent dispenser
- Peristaltic rinse aid dispenser
- Connectivity (Cloud)
- Probes for lack of detergent and rinse aid detection

Option compatibility to be confirmed by the manufacturer after verification

CAPACITY




500x665

RACK EQUIPMENT

- 1 X C86/A
- 1 X C87/B
- 1 X C97/A
- 1 X C100



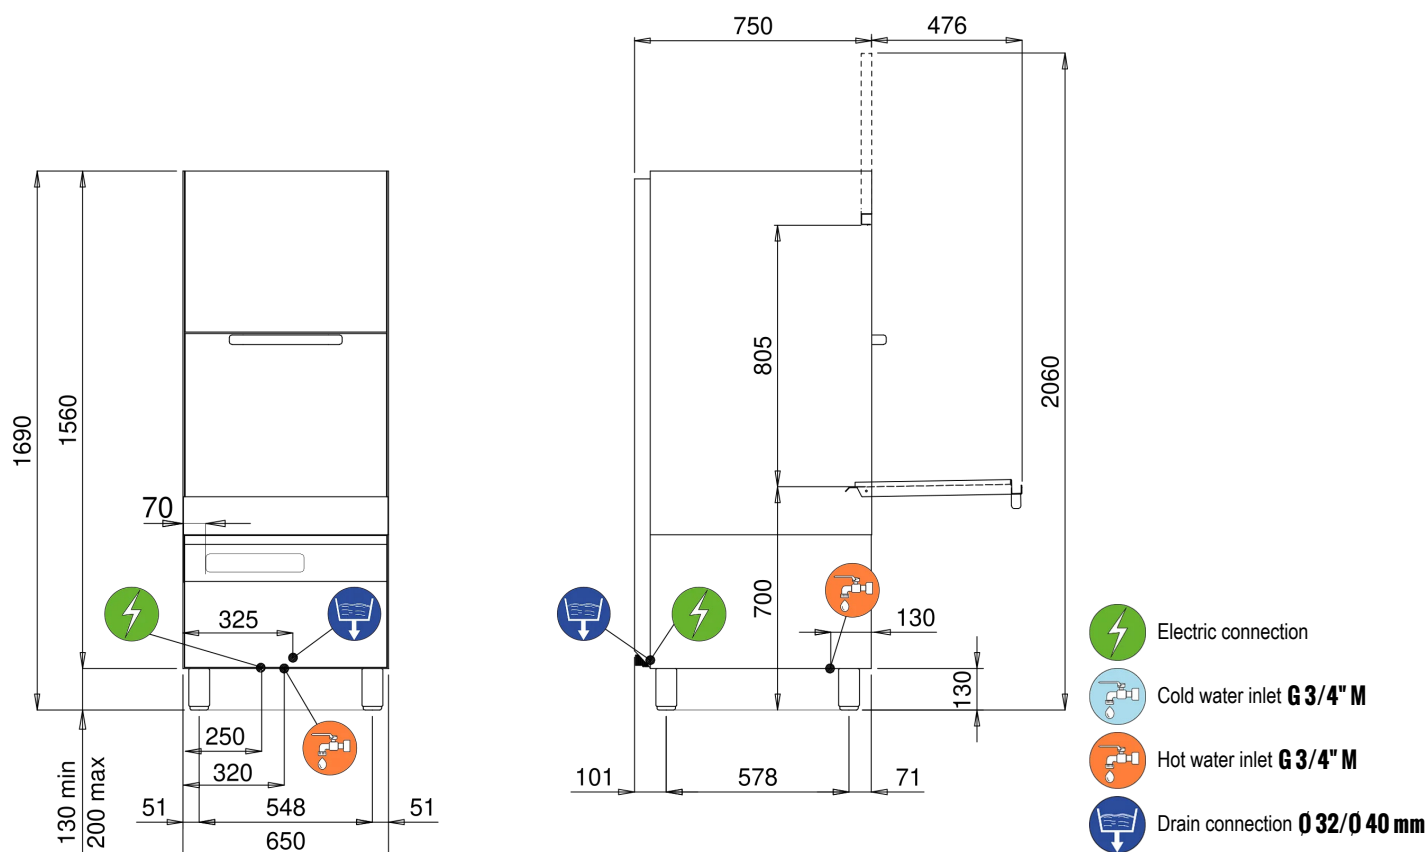

TECHNICAL FEATURES

EXTERNAL DIMENSIONS

Width	mm	650
Depth	mm	750
Height (screwed foot)	mm	1690 / 2060 (door open)
Weight (standard version)	kg	110

TECHNICAL DATA

Basket dimensions	mm	500x665
Trays support dimensions	mm	300x465x210
Crate dimension	mm	600x400x805
Maximum level of water discharge	mm	120
Water inlet temperature	°C	55
Maximum inlet water hardness	°f	8
Inlet water pressure	kPa	200 - 400
Tank capacity	l	35
Tank heating element	kW	2.7
Boiler capacity	l	10
Boiler heating element	kW	6
Wash pump power	kW	2
Wash pump flow rate	l/min	810
Rinse pump power	kW	0.15
Sound pressure level	dB(A)	72.5

POWER SUPPLY DATA		
Supply voltage		380-415 V 3N 50 Hz
Total installed power	kW	8

CYCLES					
Cycle number		1	2	3	4
Cycle length	min	2	4	6	8
Cycle productivity (racks/h) - 55°C inlet water		30	15	10	8
Cycle productivity (racks/h) - 10°C inlet water		13	13	10	8
Cycle water consumption	l	4.7	4.7	4.7	4.7
Rinsing temperature setting	°C	85	85	85	85
Washing temperature setting	°C	55	55	55	55

Standard Thermostop. In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.