

Range: LP

Introducing our wide range of professional warewashers, designed to meet the needs of every sector, from catering to industry. The LP line includes versatile solutions, designed to ensure impeccable hygiene and thorough cleaning of different types of objects, without compromising efficiency and ease of use.

Whether we talk of catering, pastry laboratories or industries, our goal is to provide tools that improve productivity and respond to daily challenges. The LP range can transform the way you work, facilitating cleaning operations and ensuring high hygiene standards.

Let yourself be inspired by the endless possibilities we offer for a professional, efficient and tailor-made washing experience for your needs.



FEATURES

- 4 customizable wash cycles
- Soft Start wash pump that offers additional protection for the most delicate objects
- New intuitive electronic control panel
- High capacity in small dimensions
- Versatility of use
- Double skin
- Deep-drawn tank
- Triple pump filter
- Trays (600x400 mm with 90° angle) and EURONORM crates 600x400x400 H (with specific griddle 575010)
- Self-cleaning cycle
- Multivoltage: easy-change voltage setting directly from the cables connection

OPTIONS

- Special voltages
- Drain pump
- Built-in peristaltic detergent dispenser
- Peristaltic rinse aid dispenser
- Connectivity (Cloud)
- Break Tank
- WRAS Break Tank
- Booster pump
- Probes for lack of detergent and rinse aid detection
- Surface filters
- Built-in water softener with automatic regeneration

Option compatibility to be confirmed by the manufacturer after verification

CAPACITY





400 H Ø 400

RACK EQUIPMENT

- 1 X 575005
- 1 X C44
- 1 X C86/A
- 1 X 575010



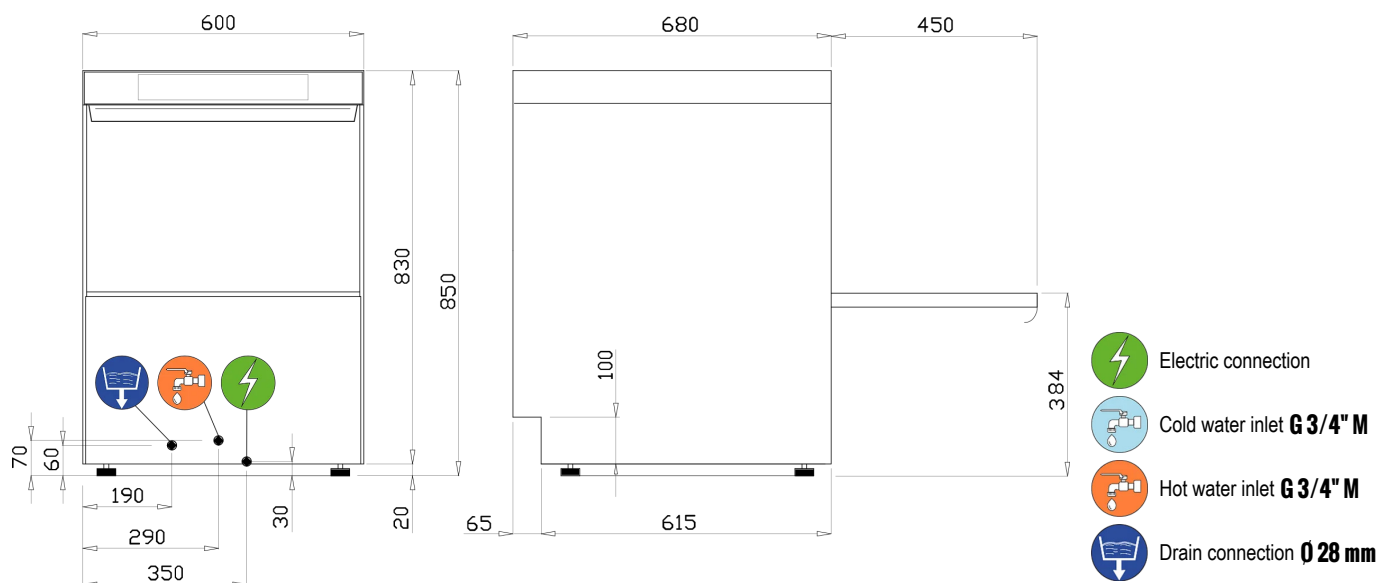

TECHNICAL FEATURES

EXTERNAL DIMENSIONS

Width	mm	600
Depth	mm	680
Height (screwed foot)	mm	850
Weight (standard version)	kg	68

TECHNICAL DATA

Trays support dimensions	mm	500x500
Glasses maximum useful height	mm	400
Maximum dish diameter	mm	400
Crate dimension	mm	600x400x400
Maximum level of water discharge	mm	50
Water inlet temperature	°C	55
Maximum inlet water hardness	°f	8
Inlet water pressure	kPa	200 - 400
Tank capacity	l	16.5
Tank heating element	kW	2.7
Boiler capacity	l	5.7
Boiler heating element	kW	6
Wash pump power	kW	0.65
Wash pump flow rate	l/min	340
Sound pressure level	dB(A)	< 70

POWER SUPPLY DATA

Supply voltage	Total installed power
380-415 V 3N 50 Hz	6.65 kW
Convertible to	
230 V 3 50 Hz	6.65 kW
230 V 50 Hz	6.65 kW

CYCLES					
Cycle number		1	2	3	4
Cycle name		1	2	3	4
Cycle length	s	60	90	120	180
Cycle productivity (racks/h) - 55°C inlet water		53	40	30	20
Cycle productivity (racks/h) - 10°C inlet water		25	25	25	20
Cycle water consumption	l	2.3	2.3	2.3	2.3
Rinsing temperature setting	°C	85	85	85	85
Washing temperature setting	°C	55	55	55	55

Standard Thermostop. In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.