

Range: LP

Introducing our wide range of professional warewashers, designed to meet the needs of every sector, from catering to industry. The LP line includes versatile solutions, designed to ensure impeccable hygiene and thorough cleaning of different types of objects, without compromising efficiency and ease of use.

Whether we talk of catering, pastry laboratories or industries, our goal is to provide tools that improve productivity and respond to daily challenges. The LP range can transform the way you work, facilitating cleaning operations and ensuring high hygiene standards.

Let yourself be inspired by the endless possibilities we offer for a professional, efficient and tailor-made washing experience for your needs.



FEATURES

- Electronic with energy saving system
- TFT electronic panel with intuitive icons, immediately visible functions and customization of programs and chemical dosages
- User-friendly multichrome START key
- Double skin
- Double skin door that can be used as a countertop
- 4 customizable wash cycles
- Self-cleaning cycle
- The PLUS System ensures optimal and constant rinsing performance thanks to the combination of Break Tank, atmospheric boiler and rinse pump
- Self-cleaning vertical wash pumps for greater operating hygiene
- The wash pumps activate one after the other to reduce the electric peak
- Innovative drain valve system for automatized drain
- Deep-drawn chair tank
- S/S independent wash and rinse arms
- Double tank filter with dirt collection system
- Thermostop to grant the rinse temperature according to HACCP regulations
- Peristaltic rinse aid dispenser

OPTIONS

- Special voltages
- Additional boiler power for cold water supply
- Drain pump
- Built-in peristaltic detergent dispenser
- Connectivity (Cloud)
- WRAS Break Tank
- DVGW Break Tank
- Probes for lack of detergent and rinse aid detection
- S/S wash pumps

Option compatibility to be confirmed by the manufacturer after verification

CAPACITY




850x725

RACK EQUIPMENT

- 1 X C86/A
- 1 X C97/A
- 1 X 92100



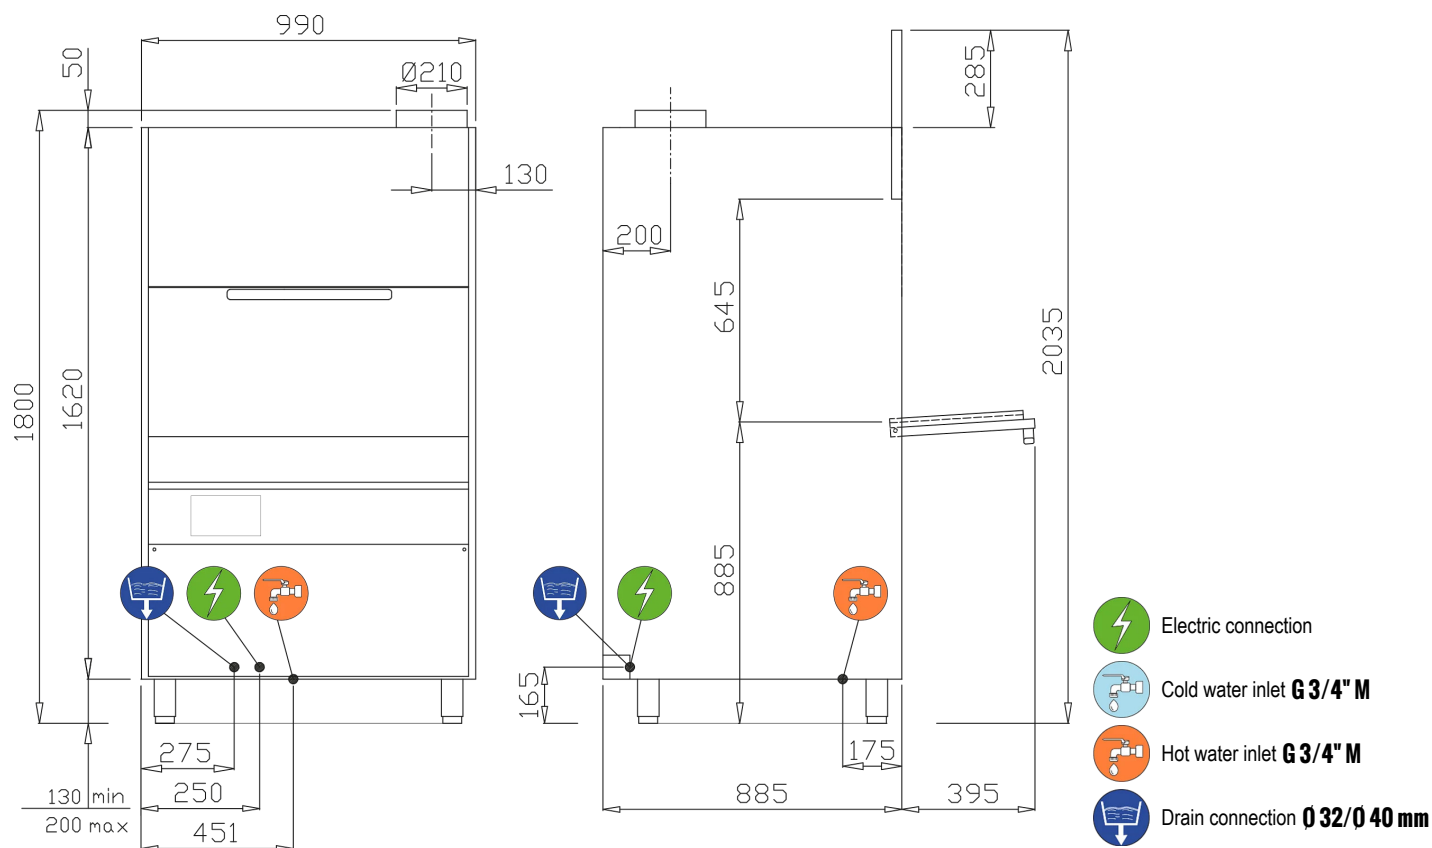

TECHNICAL FEATURES

EXTERNAL DIMENSIONS

Width	mm	990
Depth	mm	885
Height (screwed foot)	mm	1800 / 2035 (door open)
Weight (standard version)	kg	224

TECHNICAL DATA

Basket dimensions	mm	850x725
Trays support dimensions	mm	300x465x210
Crate dimension	mm	600x400x645
Maximum level of water discharge	mm	150
Water inlet temperature	°C	55
Maximum inlet water hardness	°f	8
Inlet water pressure	kPa	200 - 400
Tank capacity	l	82
Tank heating element	kW	6
Boiler capacity	l	15
Boiler heating element	kW	9
Wash pump power	kW	2.18 x 2
Wash pump flow rate	l/min	810 x 2
Rinse pump power	kW	0.25
Sound pressure level	dB(A)	73

POWER SUPPLY DATA		
Supply voltage		380-415 V 3N 50 Hz
Total installed power	kW	13.36

CYCLES					
Cycle number		1	2	3	4
Cycle length	min	3	6	9	12
Cycle productivity (racks/h) - 55°C inlet water		20	10	6	5
Cycle productivity (racks/h) - 10°C inlet water		20	10	6	5
Cycle water consumption	l	4.3	4.3	4.3	4.3
Rinsing temperature setting	°C	85	85	85	85
Washing temperature setting	°C	55	55	55	55

Standard Thermostop. In case of cold water supply and/or continuous washing, the rinse-water heating process might take more time than usual, until the proper rinse temperature is reached. For this reason, the wash-cycle total timing might result longer than set.