

# SLT 100



## FROZEN STONE



Self-contained ice maker - Pebble system  
Daily production up to 59 kg

### • Position n°



### • Application fields


Hotel	● ● ● ● ● ● ● ● ● ●	Fish market	● ● ● ● ● ● ● ● ● ●
Restaurant	● ● ● ● ● ● ● ● ● ●	Supermarket	● ● ● ● ● ● ● ● ● ●
Fast food	● ● ● ● ● ● ● ● ● ●	SPA	● ● ● ● ● ● ● ● ● ●
Bar	● ● ● ● ● ● ● ● ● ●	Medical	● ● ● ● ● ● ● ● ● ●
Disco	● ● ● ● ● ● ● ● ● ●	Industry	● ● ● ● ● ● ● ● ● ●

### • Features & Plus

- Compact and longlasting nuggets
- Low consumption (1 liter water / 1 kg ice) - aircooled vers.
- Electromechanical functioning
- External structure AISI 304 Scotch Brite
- Evaporator AISI 304, auger AISI 303 made
- Air Cooling and Water Cooling systems
- Standard and special voltages
- Insulated retractable door
- ON-OFF switch
- Dust proof water basin
- Easy cleaning thanks to rounded surfaces
- External protective filter, removable, easy to clean
- Internal bin insulation HCFC free
- Conformity to RoHS directive
- Automatic water charge
- Model in Tropical Class + 43 ° C
- Undercounter model

### • Available pebble size

Drawing for reference only



### • Prod. 24h

Air temp.	Water temp.	Prod. 24h kg
10° C	10° C	59
21° C	15° C	55
32° C	21° C	46

## 2 Years Warranty

subject to limitations

### • Certifications available for this model



[www.ntfice.it](http://www.ntfice.it)  
[info@ntfice.it](mailto:info@ntfice.it)



[ntfice.it](http://ntfice.it)




# SLT 100



## FROZEN STONE



Self-contained ice maker - Pebble system  
Daily production up to 59 kg

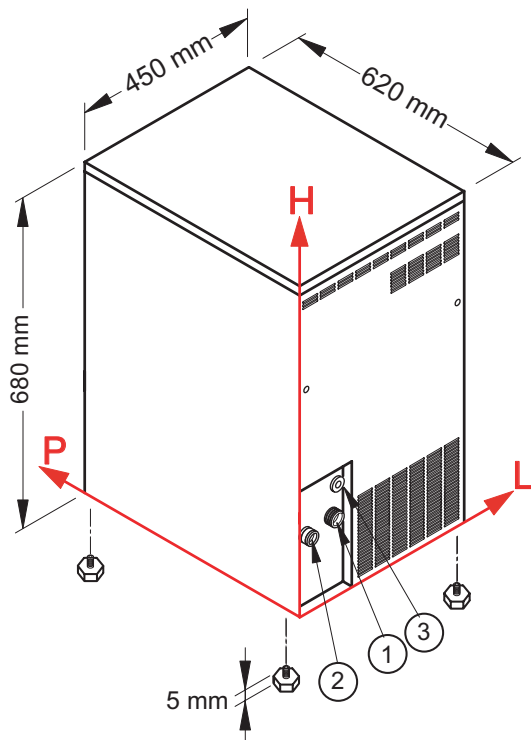

### • Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water inlet:  
106 mm - 135 mm - 3/4"
- ② Water outlet:  
55 mm - 140 mm - 24 mm
- ③ Electrical connection:  
114 mm - 218 mm

### • Working conditions

- Location: Indoor

	Min	Max
Ambient temperature	+10° C	+43° C
Water temperature	+3° C	+32° C
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

### • Technical information

Production in 24h	55 kg
Store capacity, up to	10 kg
Cooling system	A - W
Approximate pebble size	8 x 16 x 7
Refrigerant	R404A - R452A
Standard voltage	220-240 V ~ 50 Hz
Electrical consumption	420 W
Fuse	10 A
Water consumption	A: 1 l/kg W: 5,3 l/kg
Sizes (L-P-H mm)	450 - 620 - 680
Sizes with pack (L-P-H mm)	505 - 675 - 850
Net weight	56 kg
Gross weight	64 kg
Finish	AISI 304 stainless steel, scotch brite

All the technical information must be considered at the following conditions:

Sizes without feet	Ambient temperature +21° C	Water temperature +15° C	Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice  
Rev. 02 - Issued September 2019

